

Hall Current Sensor-TN202-OCS

$I_{PN}=300..2000A$

For the electronic measurement of currents:DC,AC,pulsed,mixed,
with a galvanic isolation between the primary(high power)
circuit and the secondary(electronic) circuit.



RoHS COMPLIANT



● Operating performance (AT= 25°C)

Model		TN301 OCS	TN501 OCS	TN601 OCS	TN102 OCS	TN202 OCS
Primary nominal r.m.s. current	I_{PN} (A)	300	500	600	1000	2000
Primary current measuring range	I_P (A)	0~±600	0~±1000	0~±1200	0~±2000	0~±3000
Supply voltage	V_{CC}	±15V (±5%)				
Output voltage	V_{OUT}	4V ±1% @± I_{PN} , $R_L=10K\Omega$				
Current consumption	I_C	≤±20mA @ ± I_{PN}				
Offset voltage	V_O	< ±20mV @ $I_P=0, T_A=25^\circ C$				
Linearity	ϵ_L	≤±1% @0~± I_{PN}				
Accuracy	X	±1% @ I_{PN}				
Response time	t_r	< 20µs				
di/dt accurately followed	di/dt	> 50A/µs				
Thermal drift of V_O	V_{OT}	≤±0.5mV/°C				
Thermal drift of V_{OUT}	$TC\epsilon_G$	< ±0.05%/°C				
Hysteresis offset voltage	V_{OH}	≤±20mV @ $I_{PN} \rightarrow 0$				
Isolation voltage	V_d	6KV @50(60)HZ/1min				
Isolation resistance	R_{IS}	500MΩ @500V				
Frequency bandwidth	f	0~500Hz				

● General data

Operating temperature	T_O	-25~+85°C
Storage temperature	T_S	-40~+85°C
Mass	m	410g
Note	Insulated plastic case recognized according to UL 94-V0	

● Applications

- ◆ AC variable speed drives and servo motor drives
- ◆ Static converters for DC motor drives
- Battery supplied applications
- Switched Mode Power Supplies(SMPS)
- ◆ Uninterruptible Power Supplies(UPS)
- ◆ Power supplies for welding applications


● Advantages

- ◆ Easy mounting
- ◆ Small size and space savings
- ◆ Only one design for wide current ratings range
- ◆ High immunity to external interference

Hall Current Sensor-TN202-OCS


$I_{PN}=300..2000A$

● Connection


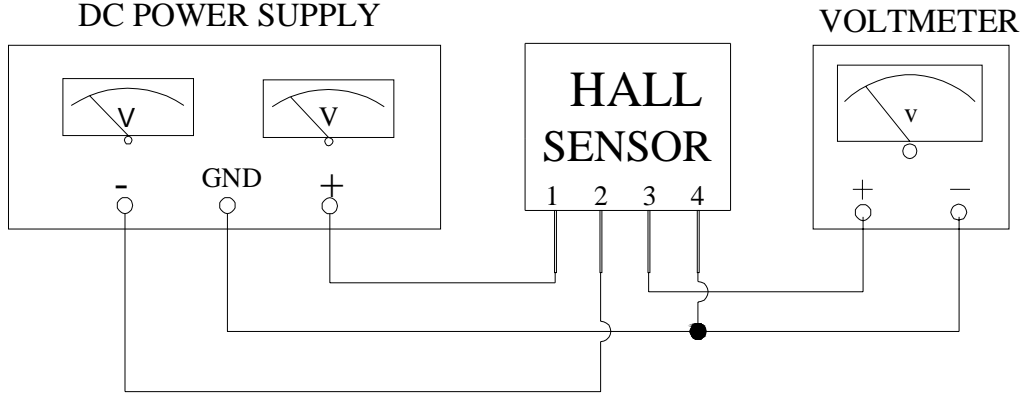


● Dimensions (Unit:mm/inch)

Front View

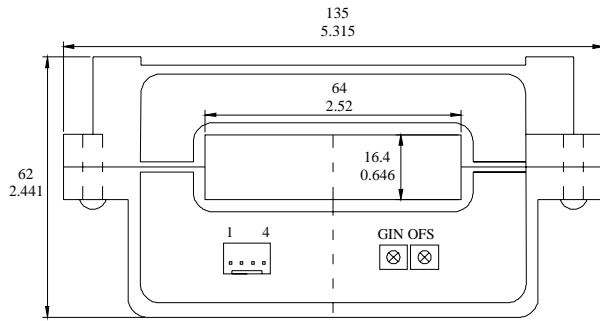

Right View

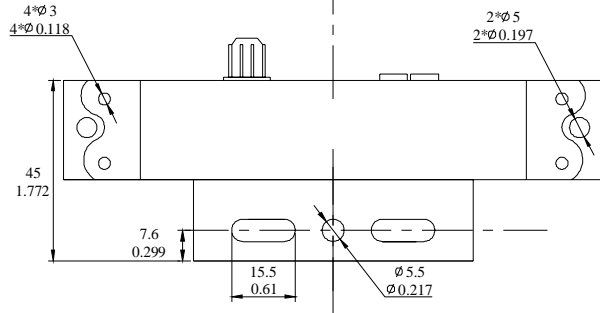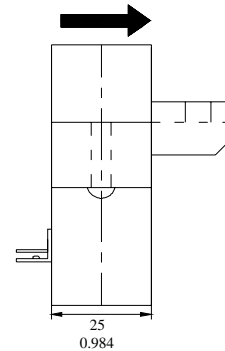

Bottom View

Secondary terminals

terminal 1	+15V
terminal 2	-15V
terminal 3	Output
terminal 4	0V

Tol : $\pm 0.5mm/0.02inch$
 connection of secondary
 Molex 22-04-1041

● Remarks

- ◆ V_{OUT} is positive when I_P flows in the direction of the arrow.
- ◆ Temperature of the primary conductor should not exceed $100^{\circ}C$.
- ◆ These are standard models. For different versions (supply voltages, secondary connections, unidirectional measurements, operating temperatures, etc.) please contact us.