

Indoor Low Voltage Current Transformer For Electrical Control Unit 50/60Hz

Part Number	Electrical Characteristic				Mechanical Dimensions in mm
	Current Ratio	Accuracy Class (%)	Turns Ratio (Np : Ns)	RL (Ω)	
CT3610200T	200A/5A	0.3s	1 : 40	15VA	
CT3620400T	400A/5A	0.3s	1 : 80	15VA	

Indoor Low Voltage Current Transformer For Electrical Control Unit 50/60Hz

Part Number	Electrical Characteristic				Mechanical Dimensions in mm
	Current Ratio	Accuracy Class (%)	Turns Ratio (Np : Ns)	RL (Ω)	
CT3620600T	600A/5A	0.3s	1 : 120	15VA	
CT3630800T	800A/5A	0.3s	1 : 160	15VA	

Indoor Low Voltage Current Transformer For Electrical Control Unit 50/60Hz

Part Number	Electrical Characteristic				Mechanical Dimensions in mm
	Current Ratio	Accuracy Class (%)	Turns Ratio (Np : Ns)	RL (Ω)	
CT3631000T	1000A/5A	0.3s	1 : 200	15VA	
CT3641200T	1200A/5A	0.3s	1 : 240	15VA	

Indoor Low Voltage Current Transformer For Electrical Control Unit 50/60Hz

Indoor L.V CT

Sealable Type.

Current Ratio : 200/5A、 400/5A、 600/5A、 800/5A、 1000/5A、 1200/5A

Frequency : 50/60Hz

Rated Burden : 15VA

Accuracy Class : 0.3s

Nominal System Voltage : 600V

Continuous Thermal Current Rating Factor , RF :


200~600A : 1.5 Times

800~1200A : 1.2 Times

Short-Time Thermal Current : 30KA

Rated Dynamic Current : 2.5 Times (Short-Time Thermal Current only)

Nomination

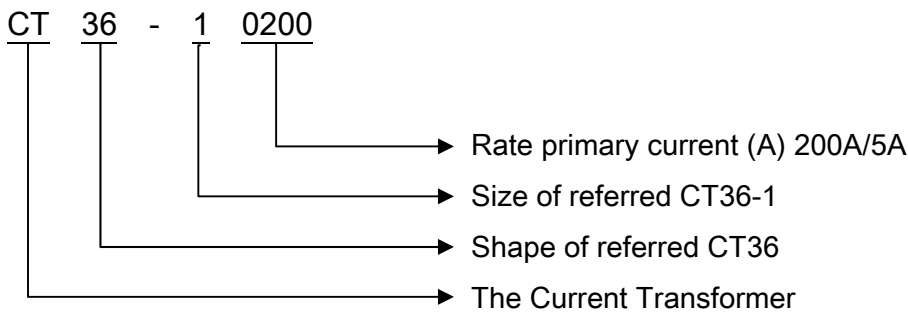

CT361
 ϕ 38*3.02kgs

CT362
 ϕ 50*2.45kgs

CT362
 ϕ 50*2.58kgs

CT363
 ϕ 65*3.18kgs

CT363
 ϕ 65*3.3kgs

CT364
 ϕ 80*3.5kgs