


AFC 60G



HOUSING Metal / Aluminum
IMPELLER Aluminum, \varnothing 60mm
BEARING Ball
OPERATING VOLTAGE 85VAC to 125VAC for 115V Type
 185VAC to 245VAC for 230V Type
DIELECTRIC STRENGTH 1,500 VAC for 1 minute
INSULATION Class A
INSULATION RESISTANCE 10M Ohms Min. @500 VDC
OPERATING TEMPERATURE 0°C to + 45°C
SAFETY Thermally Protected
ROHS COMPLIANCE Yes
MOTOR TYPE Capacitor Motor

DIMENSION

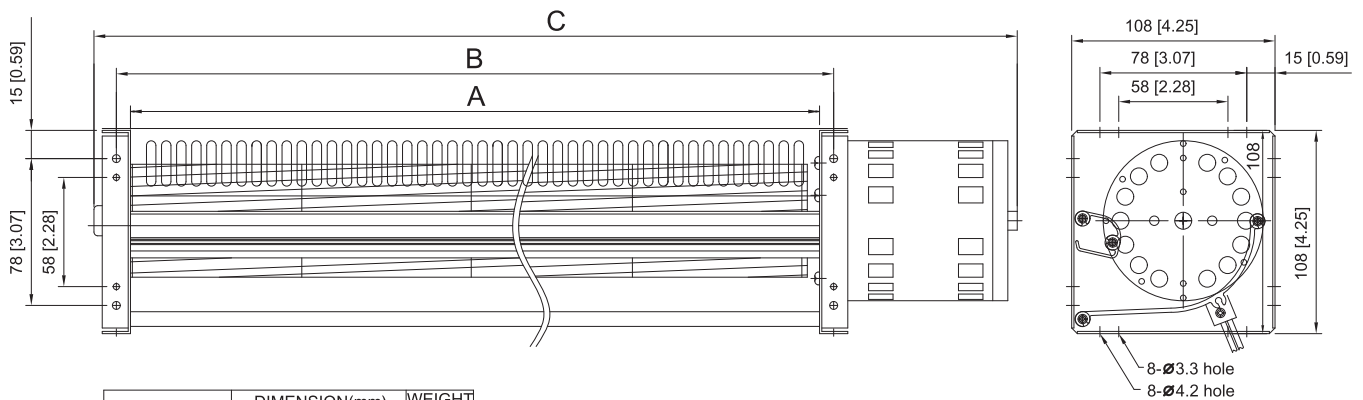

MODEL NO.	DIMENSION(mm)			WEIGHT (g)
	A	B	C	
AFC60426DVH	426	441	555	2850
AFC60368V2L	426	441	520	2800
AFC60606DVH	606	621	735	3300
AFC60606V2L	606	621	700	3200

UNIT:mm[inch]

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @ 1M
						inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
AFC60426DVH	110	60	0.56	62	2800	0.28	7.2	354	10	57
	230	50	0.22	49	2700	0.26	6.5	318	9	56
AFC60426V2L	230	50	0.11	26	1400	0.06	1.5	177	5	34
	110	60	0.67	73	2000	0.24	6.0	354	10	51
AFC60606DVH	230	50	0.28	64	2300	0.20	5.0	424	12	54
	230	50	0.11	26	1400	0.06	1.5	283	8	37

AIR PERFORMANCE

