

A12038-C-C



120x120x38mm
(4.7"x4.7"x1.5")

AC Fans & Blowers




HOUSING	Aluminum Die Casting, Painted Black
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Sleeve
MOTOR TYPE	Shaded Pole Motor
TERMINATION	Lead Wire
OPERATING VOLTAGE RANGE	185VAC to 245VAC for 230V Type
DIELECTRIC STRENGTH	1,500 VAC for 1 minute
INSULATION	Class A
INSULATION RESISTANCE	10M Ohms min. @ 500 VDC
OPERATING TEMPERATURE	-10°C to + 70°C
SAFETY	Impedance Protected
WEIGHT	485g
ROHS COMPLIANCE	Yes

120 mm

120mm

DIMENSION

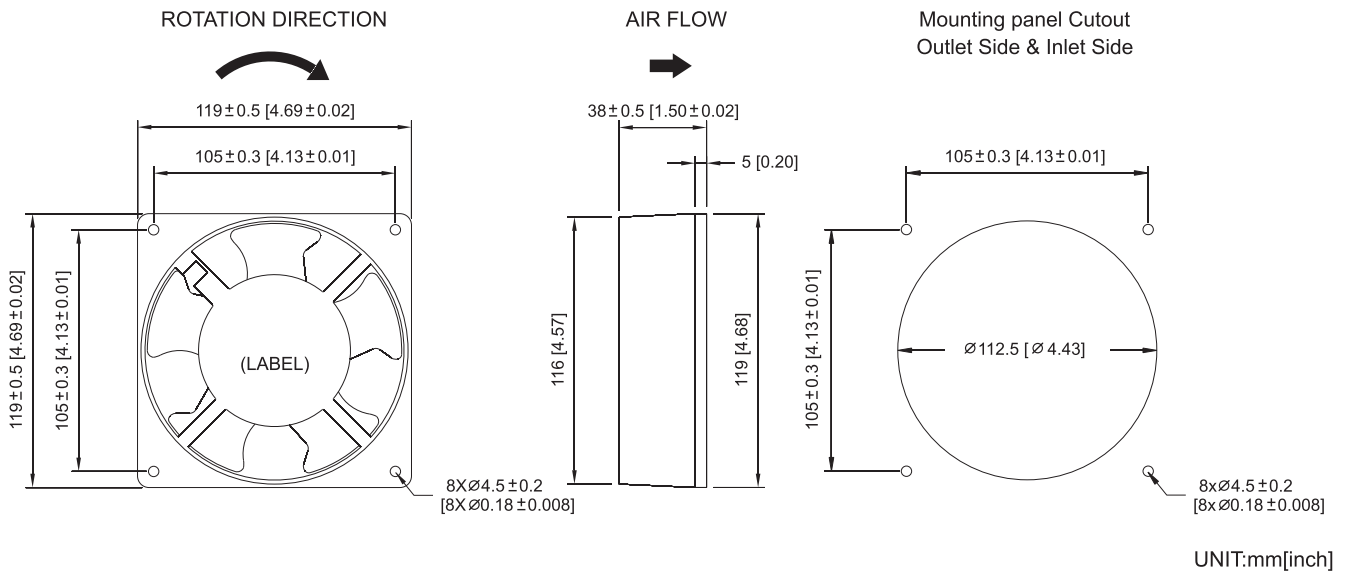

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE inchH ₂ O mmH ₂ O	MAX. AIR FLOW CFM m ³ /min	NOISE dB(A) @1M
A12038V2MSL-C-C	230	50/60	0.15/0.12	24/20	2650/3050	0.24/0.26 6.2/6.5	93/97 2.65/2.76	42/47

AIR PERFORMANCE

