

# A12738

127x127x38mm  
(5"x5"x1.5")



UL ENEC  
ELECTRIC  
EQUIPMENT  
TYPE  
APPROVED




**HOUSING** Aluminum Die Casting, Painted Black  
**IMPELLER** Thermoplastic PBT, UL94V-0  
**BEARING** Ball or Sleeve  
**MOTOR TYPE** Shaded Pole Motor  
**TERMINATION** Terminals or Lead Wire  
**OPERATING VOLTAGE RANGE** 85VAC to 125VAC for 115V Type  
 185VAC to 245VAC for 230V Type  
**DIELECTRIC STRENGTH** 1,500 VAC for 1 minute  
**INSULATION** Class A  
**INSULATION RESISTANCE** 10M Ohms min. @ 500 VDC  
**OPERATING TEMPERATURE** -10°C to +70°C  
**SAFETY** Impedance Protected  
**WEIGHT** 590g  
**ROHS COMPLIANCE** YES

# 127mm

127mm

AC Fans & Blowers

## DIMENSION

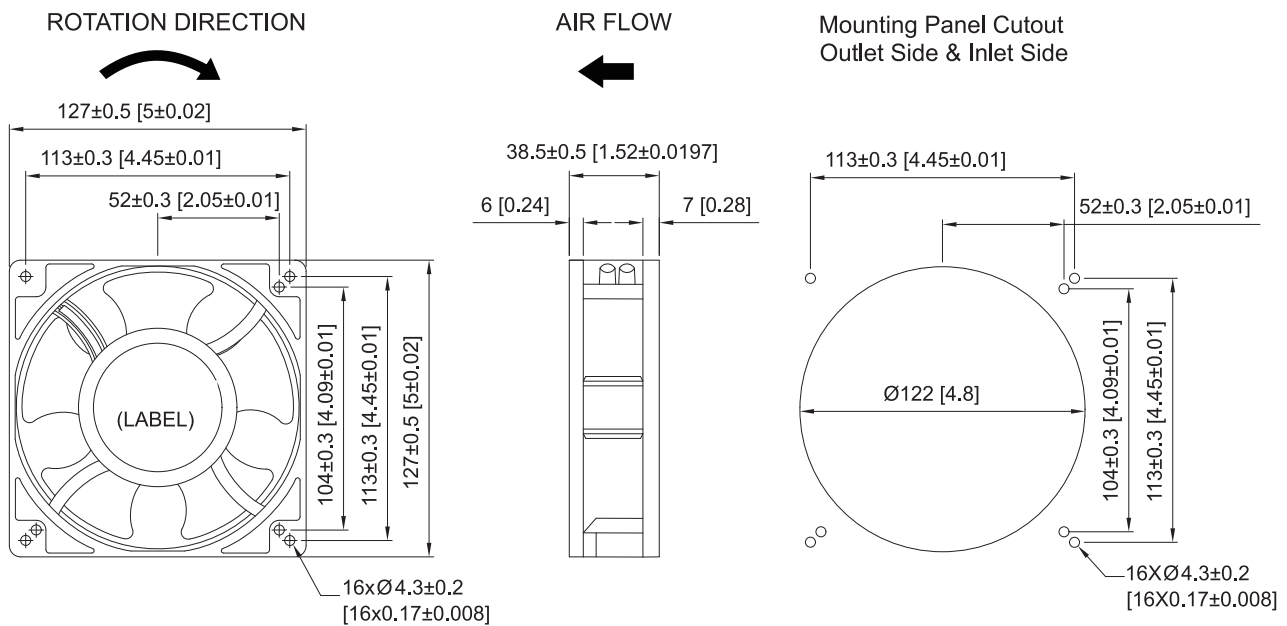

UNIT:mm [inch]

## SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE inchH <sub>2</sub> O mmH <sub>2</sub> O	MAX. AIR FLOW CFM m <sup>3</sup> /min	NOISE dB(A)@1M
A12738V1H	115	50/60	0.35/0.29	25.2/21.4	2700/3000	0.29/0.34 7.4/8.5	104/116 3.0/3.3	53
A12738V2H	230	50/60	0.20/0.16	27.8/22.6	2700/3000	0.29/0.34 7.4/8.5	104/116 3.0/3.3	53

## AIR PERFORMANCE

