

A15055-c



150x172x55mm
(5.9"x6.77"x2.17")




HOUSING
IMPELLER
BEARING
MOTOR TYPE
TERMINATION
OPERATING VOLTAGE RANGE

DIELECTRIC STRENGTH
INSULATION
INSULATION RESISTANCE
OPERATING TEMPERATURE
SAFETY
WEIGHT
ROHS COMPLIANCE

Aluminum Die Casting, Painted Black
Thermoplastic PBT, UL94V-0
Ball
Shaded Pole Motor
Lead Wire
85VAC to 125VAC for 115V Type
185VAC to 245VAC for 230V Type
1,500VAC for 1 minute
Class A
10M Ohms Min. @500 VDC
0°C to + 70°C
Impedance Protected
870g
Yes

DIMENSION

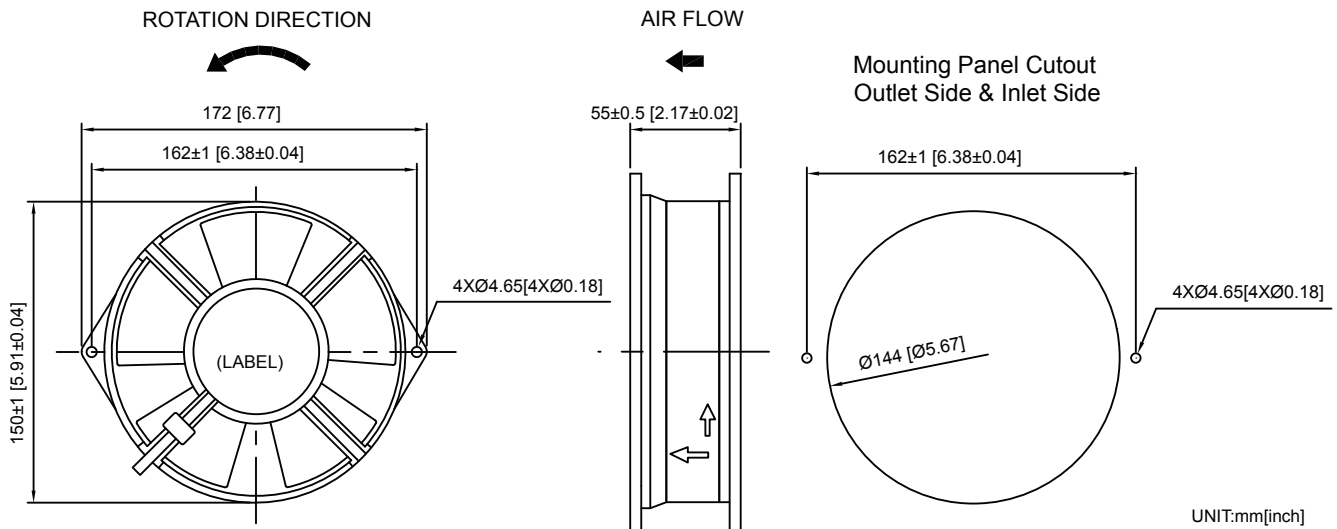

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
						inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
A15055DVHBL-C	115/230	50/60	0.48/0.2	35.5/31.7	2720/2980	0.33/0.137	8.4/3.5	207/248	5.85/7.01	51/54
A15055V1HBL-C	115	50/60	0.57/0.5	43/35	2700/3000	0.45/0.23	11.5/6.0	210/250	5.94/7.07	51/54
A15055V2HBL-C	230	50/60	0.5/0.45	38/32	2700/3000	0.42/0.11	10.8/5.3	210/250	5.94/7.07	51/54

AIR PERFORMANCE

