

# A15055-DA



150x150x55mm  
(5.9"x6.77"x2.17")




HOUSING  
IMPELLER  
BEARING  
MOTOR TYPE  
TERMINATION  
OPERATING VOLTAGE RANGE

DIELECTRIC STRENGTH  
INSULATION  
INSULATION RESISTANCE  
OPERATING TEMPERATURE  
SAFETY  
WEIGHT  
ROHS COMPLIANCE

Aluminum Die Casting, Painted Black  
Thermoplastic PBT, UL94V-0  
Ball  
Shaded Pole Motor  
Terminals or Lead wire  
85VAC to 125VAC for 115V Type  
185VAC to 245VAC for 230V Type  
1,500VAC for 1 second  
Class A  
10M Ohms Min. @500 VDC  
-20°C to + 70°C  
Impedance Protected  
800g  
Yes

## DIMENSION

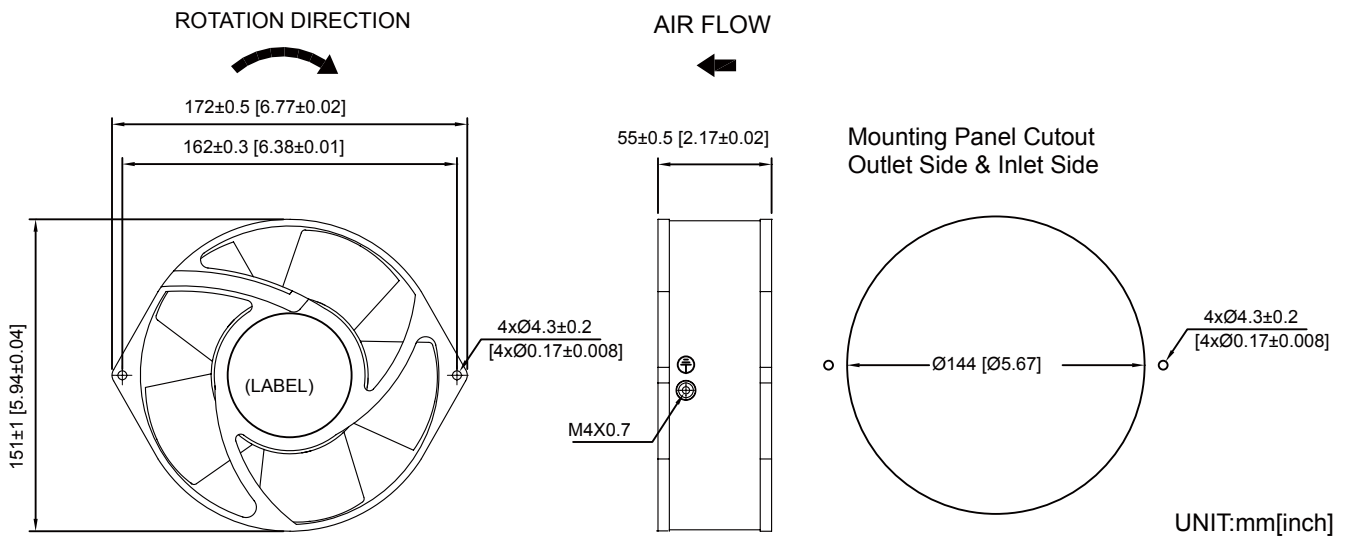

## SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
						inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
A15055V1HBL-DA	115	50/60	0.25/0.21	27/25	2700/3100	0.49/0.53	12.5/13.5	210/240	5.94/6.79	57/61
A15055V2HBL-DA	230	50/60	0.11/0.12	26/27	2700/3100	0.49/0.53	12.5/13.5	210/240	5.94/6.79	57/61

## AIR PERFORMANCE

