

A15055M-F



150x172x55mm
(5.9"x6.77"x2.17")




HOUSING
IMPELLER
BEARING
MOTOR TYPE
TERMINATION
OPERATING VOLTAGE RANGE

DIELECTRIC STRENGTH
INSULATION
INSULATION RESISTANCE
OPERATING TEMPERATURE
SAFETY
WEIGHT
ROHS COMPLIANCE

Aluminum Die Casting, Painted Black
Metal
Ball
AC Induction Capacitor Motor
Lead Wire
85VAC to 125VAC for 115V Type
185VAC to 245VAC for 230V Type
1,500VAC for 1 minute
Class F
10M Ohms min. @500 VDC
-10°C to + 70°C
Thermally Protected
1100g
Yes

DIMENSION

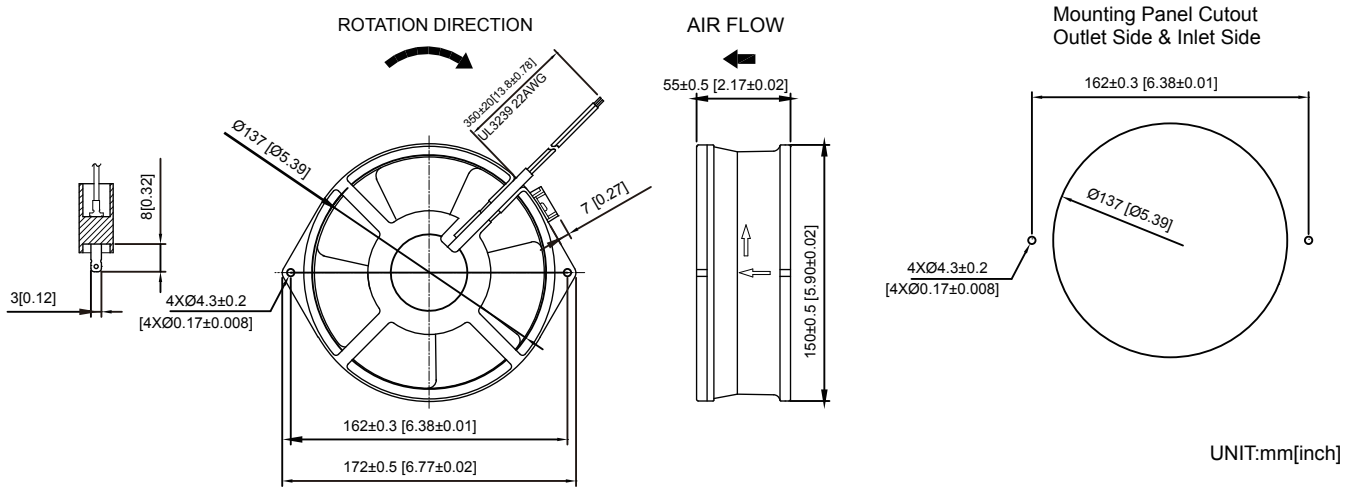

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE inchH ₂ O mmH ₂ O	MAX. AIR FLOW CFM m ³ /min	NOISE dB(A) @1M
A15055V1HBM-F	115	50/60	0.52/0.47	42/42	2800/3250	0.55/0.63 14/16	195/230 5.5/6.5	49/53
A15055V2HBM-F	230	50/60	0.25/0.23	42/42	2800/3250	0.55/0.63 14/16	195/230 5.5/6.5	49/53

AIR PERFORMANCE

