


# A16062



160x162x62mm  
(6.30"x6.30"x2.44")

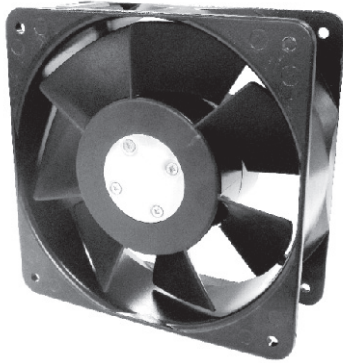


**HOUSING** Aluminum Die Casting, Painted Black  
**IMPELLER** Thermoplastic PBT, UL94V-0  
**BEARING** Ball  
**MOTOR TYPE** AC Induction Capacitor Motor  
**TERMINATION** Terminals or Lead Wire  
**OPERATING VOLTAGE RANGE** 85VAC to 125VAC for 115V Type  
 185VAC to 245VAC for 230V Type  
**DIELECTRIC STRENGTH** 1,500VAC for 1 minute  
**INSULATION** Class A  
**INSULATION RESISTANCE** 10M Ohms min.@500 VDC  
**OPERATING TEMPERATURE** -10°C to +70°C  
**SAFETY** Thermally Protected  
**WEIGHT** 1.4Kg  
**ROHS COMPLIANCE** Yes

# 160mm

160mm

AC Fans & Blowers

## DIMENSION

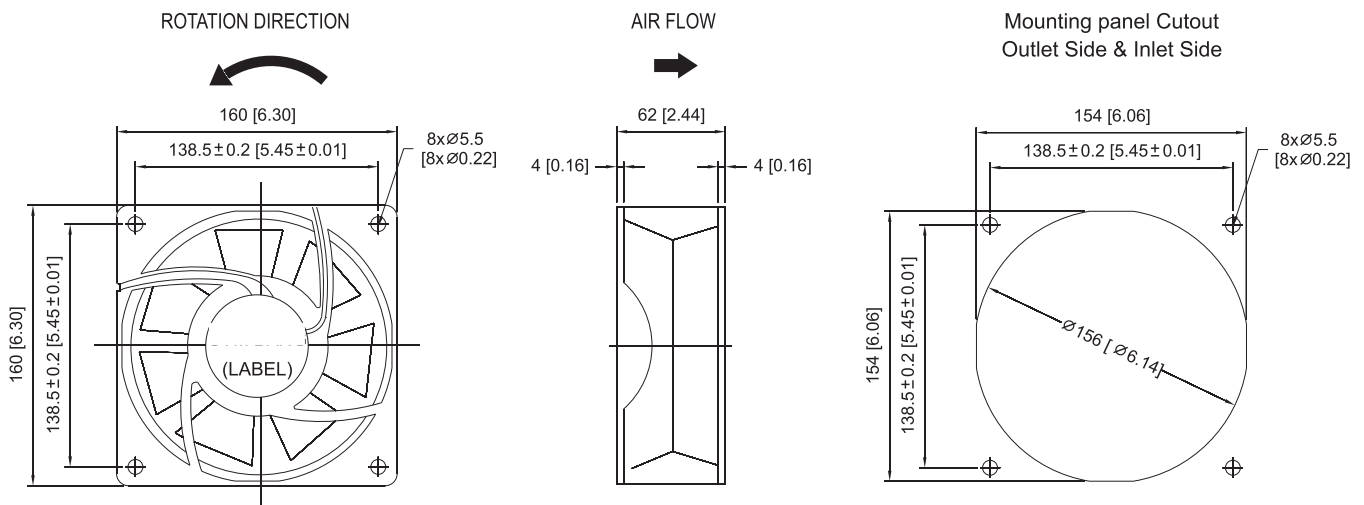

UNIT:mm[inch]

## SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
						inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
A16062V1H	115	50/60	0.45/0.50	52/60	2900/3400	0.58/0.76	14.7/19.3	261/307	7.4/8.7	60/64
A16062V2H	230	50/60	0.23/0.25	51/57	2900/3400	0.58/0.76	14.7/19.3	261/305	7.4/8.6	60/64

## AIR PERFORMANCE

