

A16062R



160x162x62mm
(6.30"x6.30"x2.44")




HOUSING Aluminum Die Casting, Painted Black
IMPELLER Thermoplastic PBT, UL94V-0
BEARING Ball
MOTOR TYPE AC Induction Capacitor Motor
TERMINATION Terminals or Lead Wire
OPERATING VOLTAGE RANGE 85VAC to 125VAC for 115V Type
 185VAC to 245VAC for 230V Type
DIELECTRIC STRENGTH 1,500VAC for 1 minute
INSULATION Class A
INSULATION RESISTANCE 10M Ohms min.@500 VDC
OPERATING TEMPERATURE -10°C to +70°C
SAFETY Thermally Protected
WEIGHT 1.4Kg
ROHS COMPLIANCE Yes

160mm

160mm

AC Fans & Blowers

DIMENSION

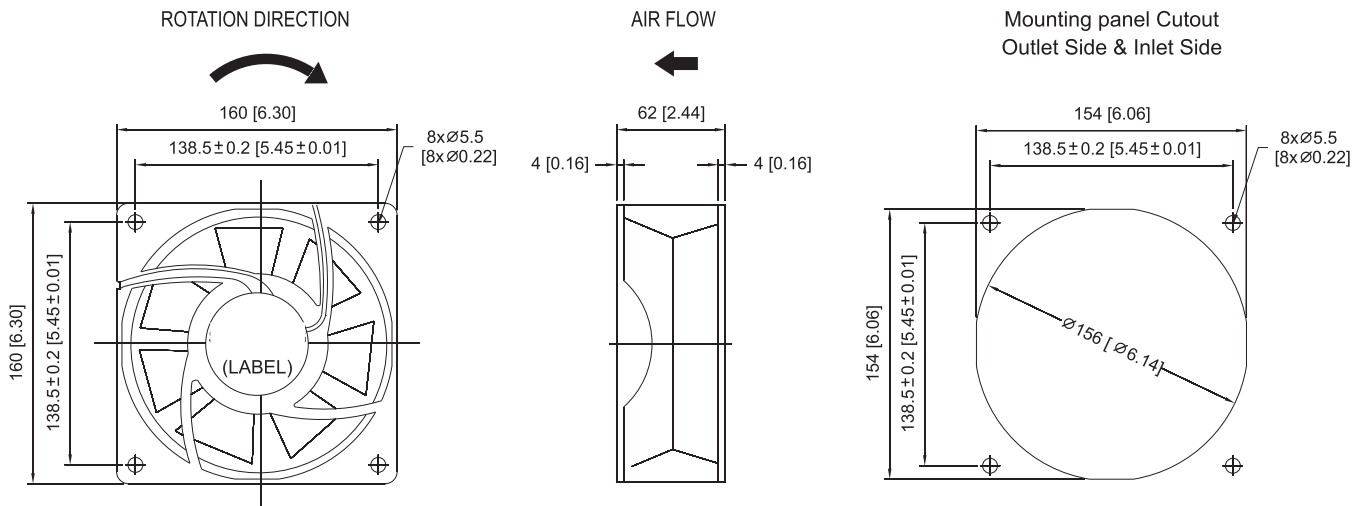

UNIT:mm[inch]

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
						inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
A16062V1HR	115	50/60	0.45/0.50	52/60	2900/3400	0.58/0.76	14.7/19.3	261/307	7.4/8.7	60/64
A16062V2HR	230	50/60	0.23/0.25	51/57	2900/3400	0.58/0.76	14.7/19.3	261/305	7.4/8.6	60/64

AIR PERFORMANCE

