

# A17238M




172x151x38mm  
(6.8"x5.9"x1.5")



**HOUSING** Aluminum Die Casting, Painted Black  
**IMPELLER** Metal  
**BEARING** Ball  
**MOTOR TYPE** Outer Rotor, AC Induction Capacitor Motor  
**TERMINATION** Terminals or Lead Wire  
**OPERATING VOLTAGE RANGE** 85VAC to 125VAC for 115V Type  
 185VAC to 245VAC for 230V Type  
 1,500VAC for 1 minute  
**DIELECTRIC STRENGTH** Class A  
**INSULATION** 10M Ohms Min. @500 VDC  
**INSULATION RESISTANCE** -10°C to +70°C  
**OPERATING TEMPERATURE** Thermally Protected  
**SAFETY** 820g  
**WEIGHT** Yes  
**ROHS COMPLIANCE**

## DIMENSION

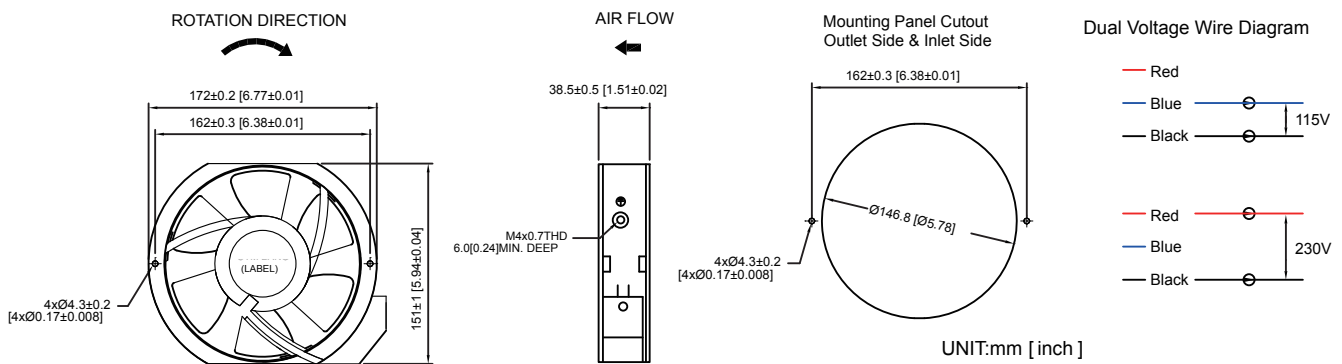

## SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
						inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
A17238V1HBM	115	50/60	0.25/0.21	27/25	2700/3100	0.53/0.57	13.5/14.5	210/240	5.94/6.79	52/58
A17238V2HBM	230	50/60	0.11/0.12	26/27	2700/3100	0.53/0.57	13.5/14.5	210/240	5.94/6.79	52/58
A17238DVHBLM	115	50/60	0.23/0.23	27/27	2650/3000	0.39/0.31	10.0/8.00	215/225	6.08/7.21	52/58
	230	50/60	0.13/0.11	26/26	2650/3000	0.47/0.43	12.0/11.0	215/225	6.08/7.24	52/58

## AIR PERFORMANCE

