

A17251DV



172x151x51mm
(6.77"x6"x2")




HOUSING	Aluminum Die Casting, Painted Black
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
MOTOR TYPE	Shaded Pole Motor
TERMINATION	Lead Wire
OPERATING VOLTAGE RANGE	85 VAC to 125 VAC for 115V Type 185 VAC to 245 VAC for 230 V Type
DIELECTRIC STRENGTH	1,500 VAC for 1 minute
INSULATION	Class A
INSULATION RESISTANCE	10M Ohms min. @ 500VDC
OPERATING TEMPERATURE	-10°C to + 70°C
SAFETY	Impedance Protected
WEIGHT	1000g
ROHS COMPLIANCE	Yes

172mm

172mm

AC Fans & Blowers

DIMENSION

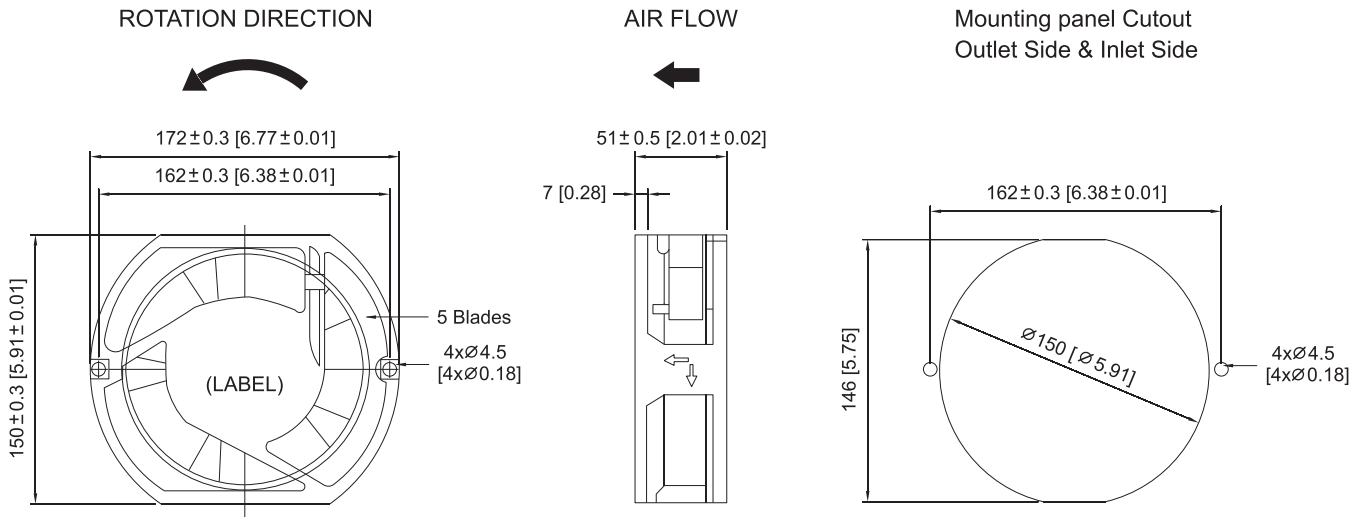

UNIT:mm[inch]

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
						inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
A17251DVHBL	115 230	50/60	0.43/0.40 0.22/0.20	35/32	2800/3100	0.56/0.71	14.2/18.0	190/222	5.4/6.3	50/55

AIR PERFORMANCE

