

# A28080M-DA




280x280x80mm  
(11.02"x11.02"x3.15")



HOUSING  
IMPELLER  
BEARING  
MOTOR TYPE  
TERMINATION  
OPERATING VOLTAGE RANGE  
  
DIELECTRIC STRENGTH  
INSULATION  
INSULATION RESISTANCE  
OPERATING TEMPERATURE  
SAFETY  
WEIGHT  
ROHS COMPLIANCE

Aluminum Die Casting  
Metal  
Ball  
AC Induction Capacitor Motor  
Terminal Block  
85VAC to 125VAC for 115V Type  
185VAC to 245VAC for 230V Type  
1,800VAC for 1 second  
Class F, IP54  
100M Ohms Min. @500 VDC  
-20°C to + 70°C  
Thermally Protected  
3050g  
Yes

## DIMENSION

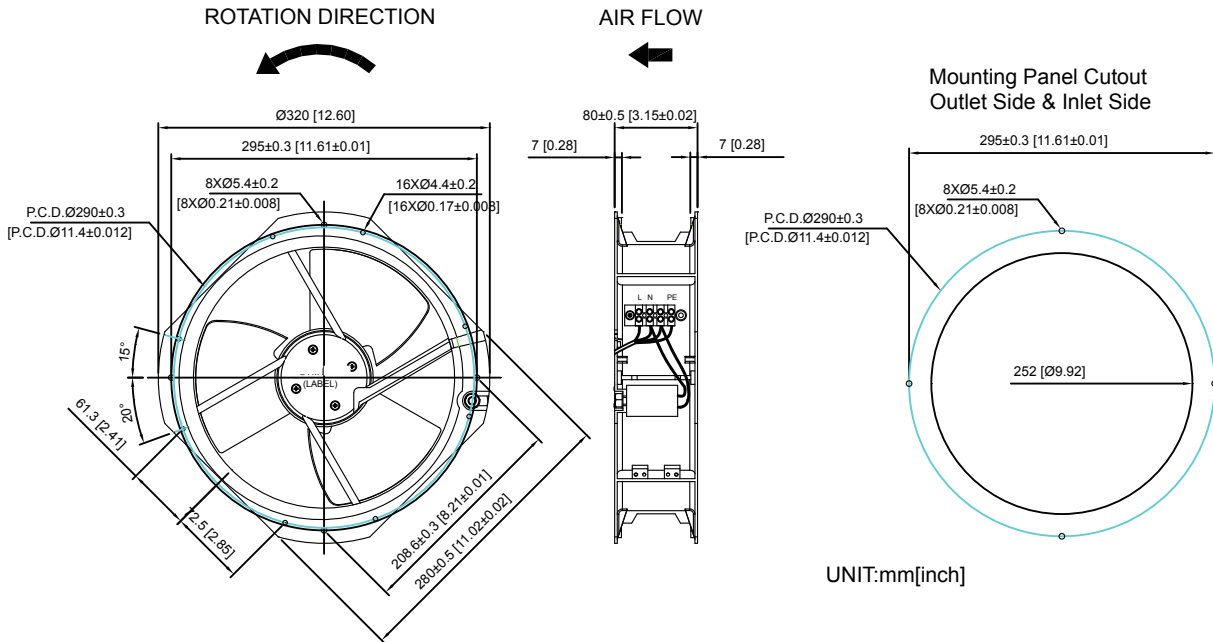

## SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
						inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
A28080V1HBTM-DA	115	50/60	0.81/1.20	94/136	2650/2900	0.93/0.80	23.5/20.5	1030/1150	29.1/32.54	70/73
A28080V2HBTM-DA	230	50/60	0.43/0.63	95/138	2650/2900	0.93/0.80	23.5/20.5	1030/1150	29.1/32.54	70/73

## AIR PERFORMANCE

