

A28080M-F




280x280x80mm
(11.02"x11.02"x3.15")



HOUSING	Aluminum Die Casting
IMPELLER	Metal
BEARING	Ball
MOTOR TYPE	AC Induction Capacitor Motor
TERMINATION	Terminal
OPERATING VOLTAGE RANGE	85VAC to 125VAC for 115V Type 185VAC to 245VAC for 230V Type
DIELECTRIC STRENGTH	1,500VAC for 1 minute
INSULATION	Class A
INSULATION RESISTANCE	10M Ohms Min. @500 VDC
OPERATING TEMPERATURE	-10°C to +70°C
SAFETY	Thermally Protected
WEIGHT	2.8 kg
ROHS COMPLIANCE	Yes

DIMENSION

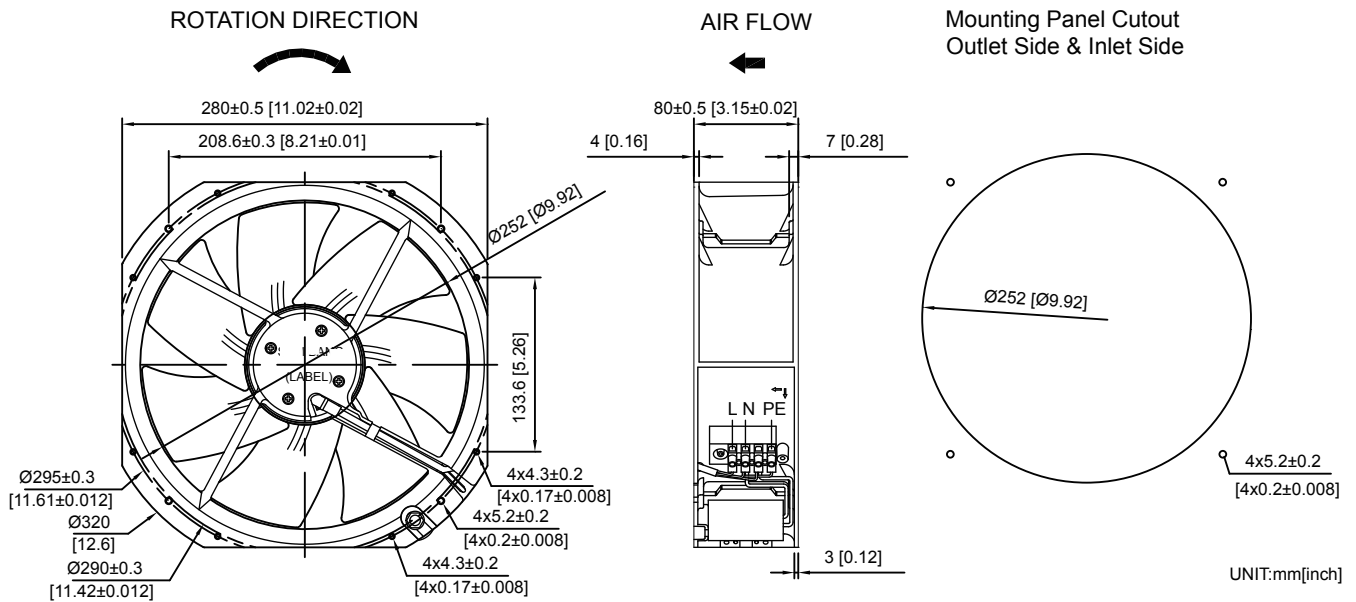

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
						inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
A28080V1HBTM-F	115	50/60	1.00/1.50	112/148	2550/2700	0.78/0.65	20.0/16.5	1090/1130	31/32	68/70
A28080V2HBTM-F	230	50/60	0.59/0.82	119/158	2550/2700	0.78/0.65	20.0/16.5	1090/1130	31/32	68/70

AIR PERFORMANCE

