

AB 22056-F




220x220x56mm
(8.66"x8.66"x2.2")



HOUSING	Spiral Housing of Fiberglass-Reinforced Polycarbonate Base of Galvanized Steel Plate Fiberglass-Reinforced Polycarbonate
IMPELLER	Ball or Sleeve
BEARING	Shaded pole
MOTOR TYPE	Lead wire
TERMINATION	
OPERATING VOLTAGE RANGE	85VAC to 125VAC for 115V Type 185VAC to 245VAC for 230V Type
DIELECTRIC STRENGTH	1,500VAC for 1 second
INSULATION	Class A
INSULATION RESISTANCE	10M Ohms Min. @500 VDC
OPERATING TEMPERATURE	-10°C to + 70°C for Ball Type
SAFETY	Impedance Protected
WEIGHT	1730g
ROHS COMPLIANCE	Yes

DIMENSION

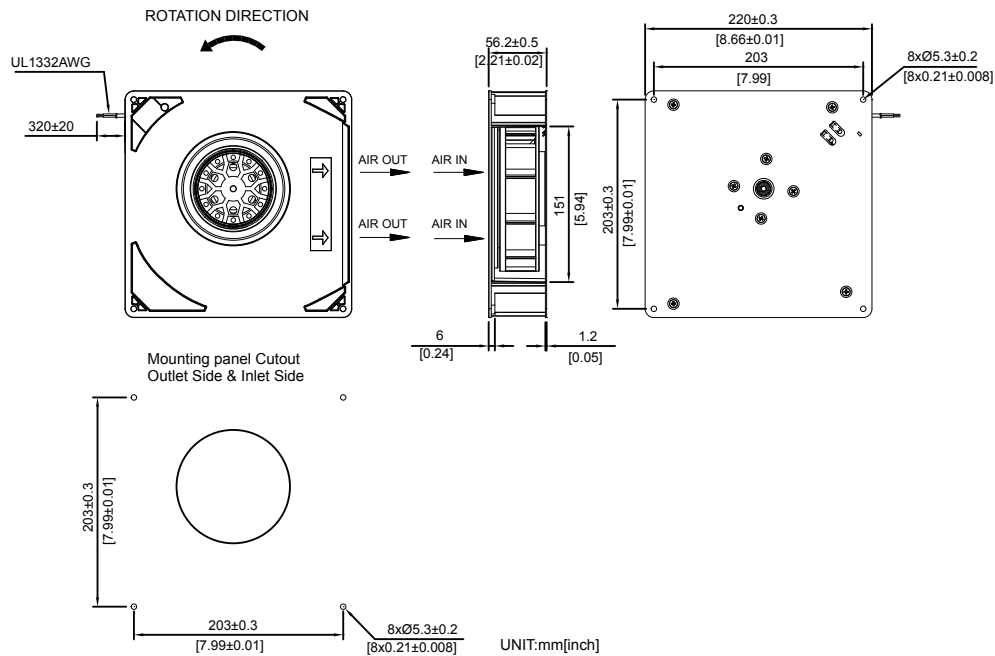

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE
						inchH ₂ O	mmH ₂ O	CFM	m ³ /min	dB(A) @1M
AB22056V1HBL-F	115	50/60	0.70/0.60	50/52	2700/2900	1.3/1.8	33/46	118/126	3.3/3.6	63/65
AB22056V2HBL-F	230	50/60	0.40/0.30	50/53	2700/2900	1.3/1.8	33/46	118/126	3.3/3.6	63/65

AIR PERFORMANCE

