

ACB254219

Double Inlet Blower



254x219mm, 2 Poles & 4 Poles
(10"x8.62")




MOTOR
IMPELLER
BEARING
INSULATION
INSULATION RESISTANCE
OPERATING TEMPERATURE
DIELECTRIC STRENGTH
SAFETY
ROHS COMPLIANCE

Outer rotor motor $\varnothing 92\text{mm}$
Metal
Ball
Class F
0 °C to 65 °C
10M Ohms Min. @500VDC
5mA Max. at 1500 VAC for 1 minute
Thermally Protected
YES

254 mm


DIMENSION

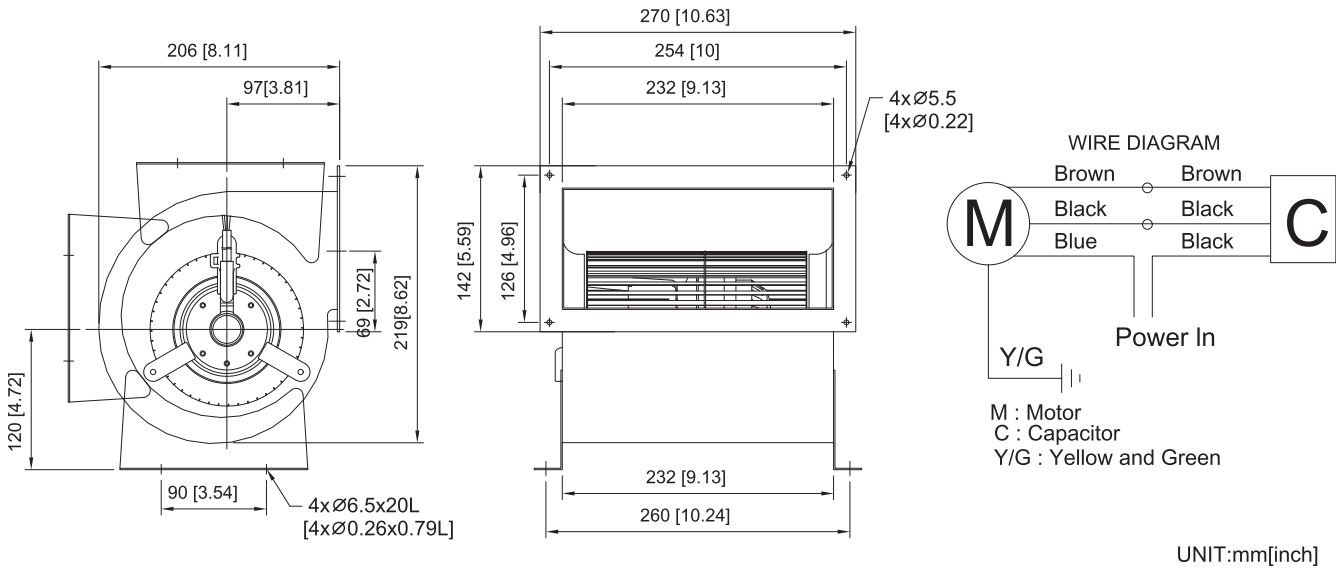

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	FREQUENCY (Hz)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A)@1M	CAPACITOR $\mu\text{F}/\text{Vac}$
						inchH ₂ O	mmH ₂ O	CFM	m ³ /min		
ACB254219V1H2P	110	60	3.02	330	1610	2.41	61.20	612	17.30	72	30/250
ACB254219V1M2P	110	60	2.30	250	1040	1.97	49.98	536	15.17	63	20/250
ACB254219V2H2P	220	50/60	1.3/1.5	285/330	1690/1610	1.85/2.41	46.92/61.20	627/615	17.75/17.42	63/63	8/450
ACB254219V2M2P	220	50/60	1.03/1.15	225/250	1130/1040	1.73/1.97	43.86/49.98	583/536	16.50/15.17	61/61	6/450
ACB254219V2H4P	220	50/60	0.41/0.50	90/110	1000/900	0.56/0.68	14.28/17.34	429/465	13.92/13.17	55/58	2.5/450

AIR PERFORMANCE

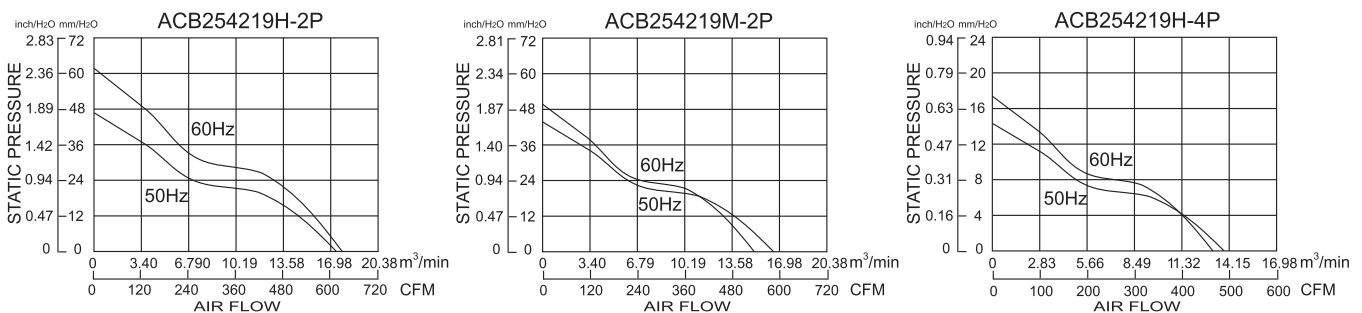

254mm

AC/DC/EC Centrifugal Fans & Blowers