

DCB 352108




352x108x101mm
(13.85"x4.25"x3.97")



HOUSING	Plastic
IMPELLER	Plastic
BEARING	Ball
INSULATION	Class A
OPERATING TEMPERATURE	-20°C to +40°C
INSULATION RESISTANCE	10M Ohms Min. @500VDC
DIELECTRIC STRENGTH	5mA Max. at 500VAC for 1 minue
WEIGHT	1.8kg
ROHS COMPLIANCE	Yes

DIMENSION

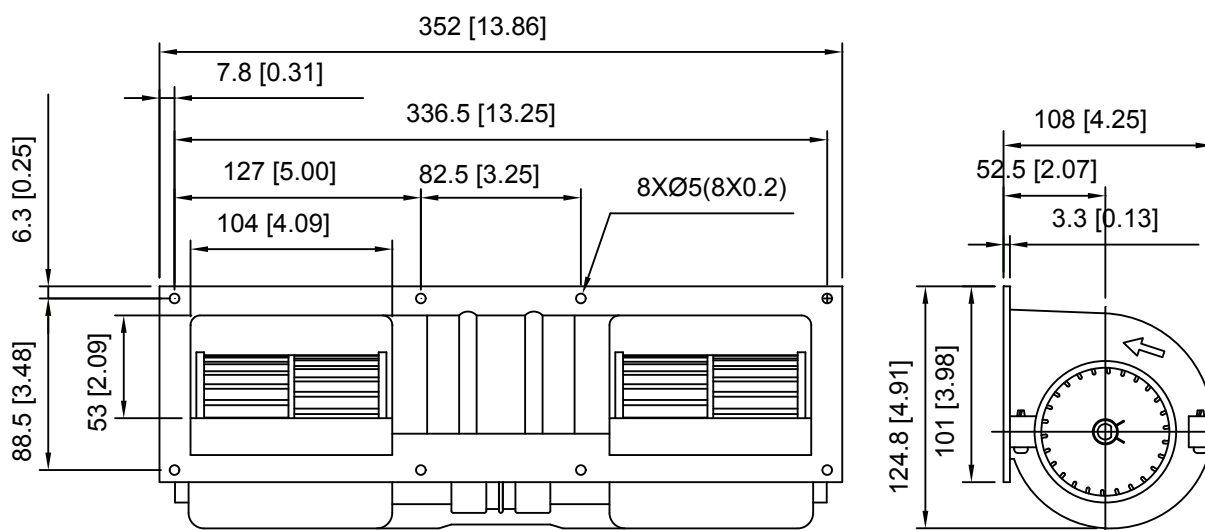

UNIT:mm[inch]

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
DCB352108V27H	27	6.4	172	3700	1.9	50	636	17.99	72
DCB352108V24H	24	6.5	156	3750			383	10.83	70
DCB352108V12H	12	8.4	100	3260			365	10.33	70

AIR PERFORMANCE

