


# DFA 60



HOUSING  
IMPELLER  
BEARING  
OPERATING TEMPERATURE  
INSULATION RESISTANCE  
DIELECTRIC STRENGTH  
ROHS COMPLIANCE  
MOTOR TYPE

Metal / Aluminum  
Aluminum,  $\varnothing 60$  mm  
Ball  
0°C to + 45°C  
10M Ohms Min. @500 VDC  
5mA Max.at 500VAC for 1 minute  
Yes  
DC Brushless Motor

## DIMENSION

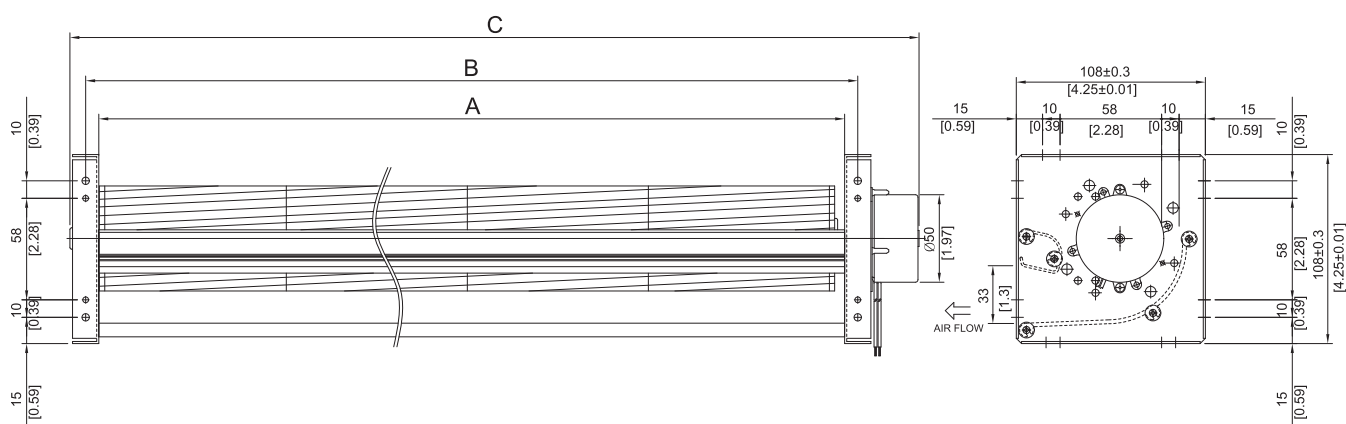

MODEL NO.	DIMENSION(mm)			WEIGHT (g)
	A	B	C	
DFA60426	426	443	485	1200
DFA60606	606	623	665	1500

UNIT:mm[inch]

## SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A)@ 1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
DF60426V12H	12	0.70	8.4	1300	0.07	1.9	166	4.7	37
DF60426V24H	24	0.35	8.4	1300	0.07	1.9	166	4.7	37
DF60606V12H	12	0.80	9.6	1200	0.07	1.9	212	6.0	35
DF60606V24H	24	0.40	9.6	1200	0.07	1.9	212	6.0	35

## AIR PERFORMANCE

