

DB 242264




242x264x240mm
(9.53"x10.39"x9.45")



HOUSING
IMPELLER
BEARING
OPERATING TEMPERATURE
INSULATION RESISTANCE
DIELECTRIC STRENGTH
WEIGHT
ROHS COMPLIANCE

Steel
Steel
Ball
0°C to + 40°C
20M Ohms Min. @500 VDC
5mA Max. at 700VDC for 1 second
4.3kg
Yes

DIMENSION

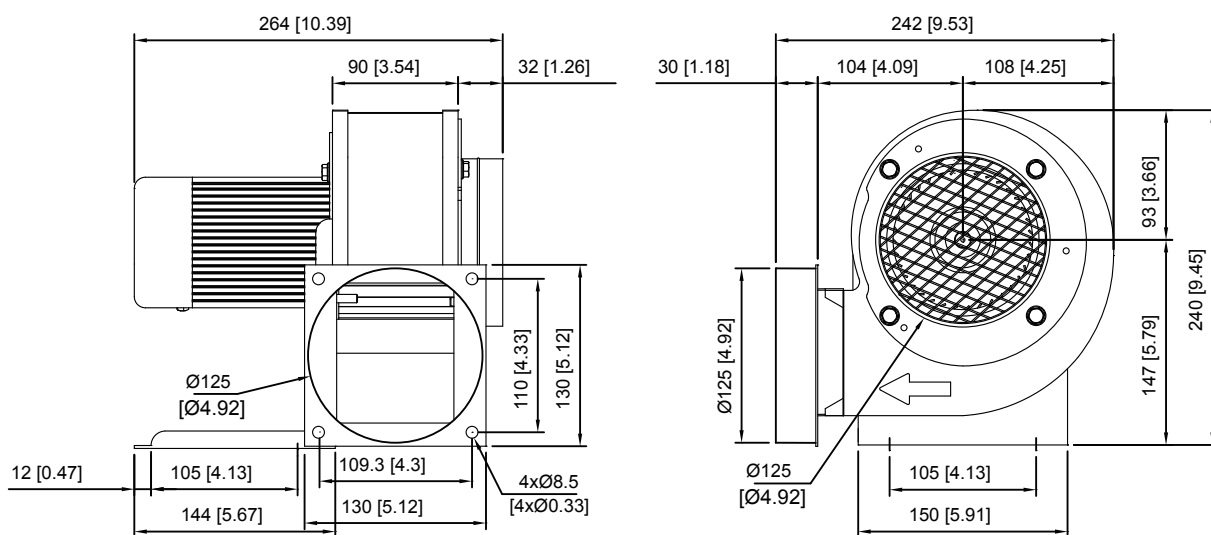

UNIT:mm[inch]

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE inchH ₂ O mmH ₂ O	MAX. AIR FLOW CFM m ³ /min	NOISE dB(A) @1M
DB242264V24HB	24	9	216	3570	4.02 102	327.7 9.27	75

AIR PERFORMANCE

