

D11336-CT




113x113x36mm
(4.407"x4.407"x1.404")



HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball or Sleeve
OPERATING TEMPERATURE	-40°C to + 70°C
INSULATION RESISTANCE	10M Ohms Min. @500 VDC
DIELECTRIC STRENGTH	5mA Max. at 500VAC 60Hz for 1 minute
WEIGHT	170g
ROHS COMPLIANCE	Yes

DIMENSION

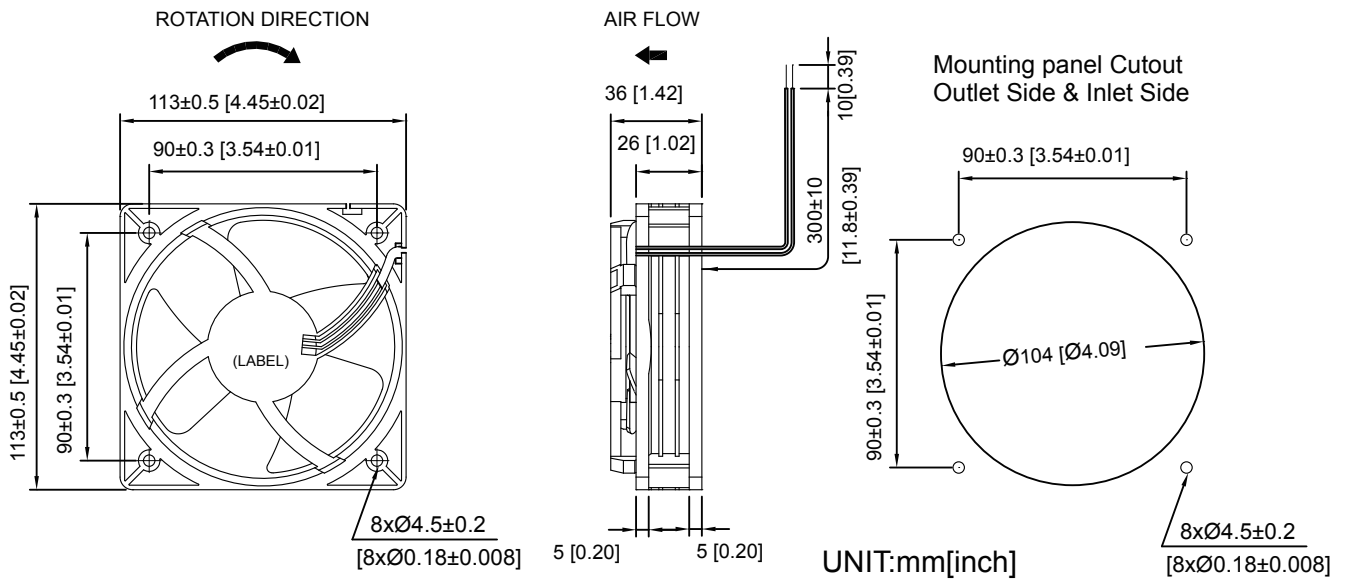

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
D11336V12M-CT	12	0.17	2.04	3300	0.26	6.71	59.33	1.68	35.5

AIR PERFORMANCE

