

D12025-CT




120x120x25mm
(4.72"x4.72"x1.26")



HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball or Sleeve
OPERATING TEMPERATURE	-10°C to + 70°C
INSULATION RESISTANCE	10M Ohms Min. @500VDC
DIELECTRIC STRENGTH	5mA Max. at 500VAC 60Hz for 1 second
WEIGHT	180g
ROHS COMPLIANCE	Yes

DIMENSION

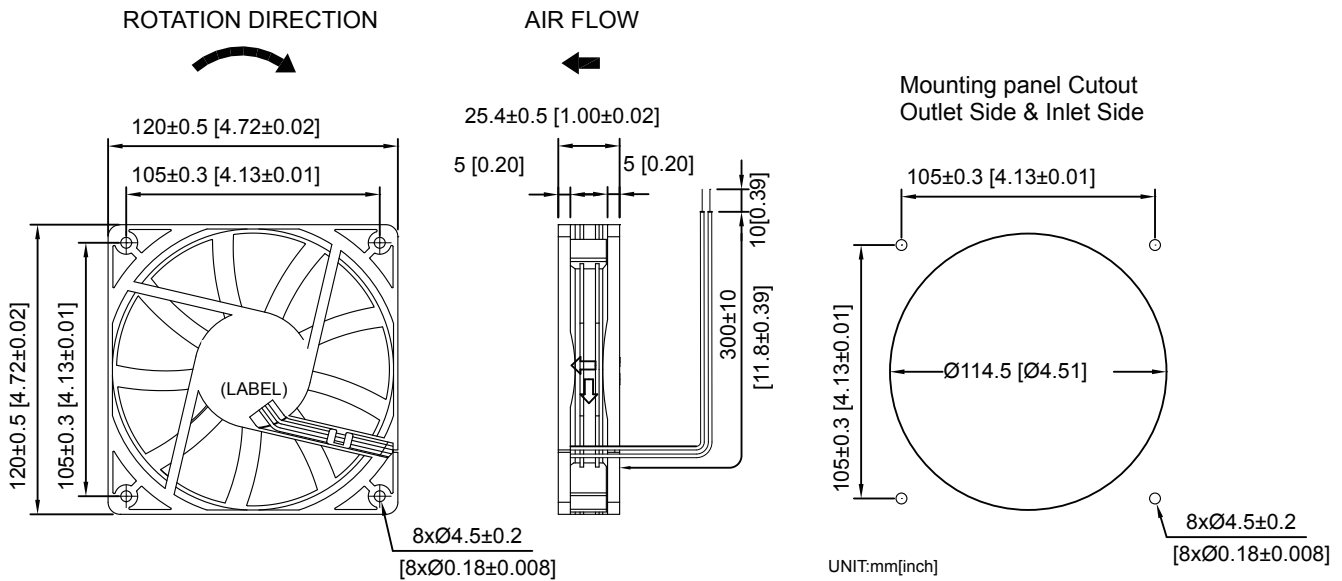

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
D12025V12H-CT	12	0.73	8.76	3200	0.37	9.37	133.01	3.77	49.6
D12025V12M-CT	12	0.38	4.56	2700	0.26	6.67	112.23	3.18	45.4
D12025V12L-CT	12	0.26	3.12	2000	0.14	3.66	83.13	2.35	37.2
D12025V12XL-CT	12	0.15	1.80	1300	0.06	1.55	54.04	1.53	26.6
D12025V12XXL-CT	12	0.08	0.96	1000	0.04	0.92	41.57	1.18	22.2

AIR PERFORMANCE

