

D12038D-CT




120x120x38mm
(4.72"x4.72"x1.50")



HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball or Sleeve
OPERATING TEMPERATURE	-10°C to +70°C
INSULATION RESISTANCE	10M Ohms Min. @500 VDC
DIELECTRIC STRENGTH	5mA Max. at 500VAC 60Hz for 1 minute
WEIGHT	411g
ROHS COMPLIANCE	Yes

DIMENSION

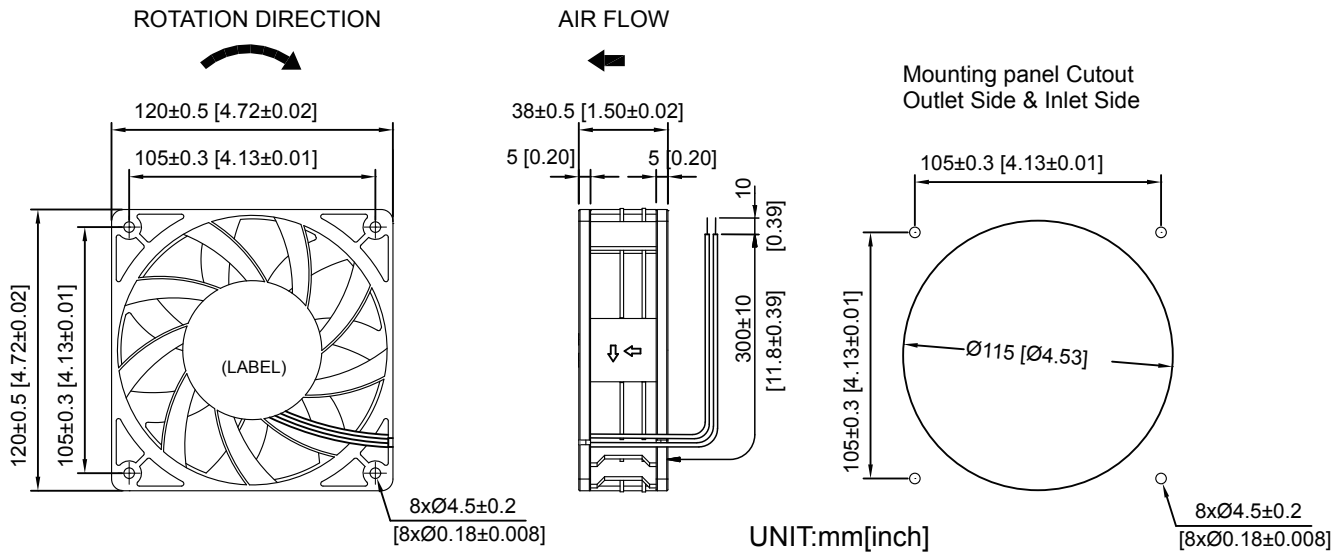

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
D12038V12SLBD-CT	12	3.50	42.00	6400	1.37	34.91	236.97	6.71	65.2
D12038V12HBD-CT	12	2.30	27.60	5500	1.01	25.78	203.64	5.77	60.9
D12038V48SMBD-CT	48	1.50	72.00	7500	1.89	47.90	277.70	7.86	69.8
D12038V48HBD-CT	48	0.49	23.52	5500	1.01	25.78	203.64	5.77	60.9

AIR PERFORMANCE

