

D12038M-CT




120x120x38mm
(4.72"x4.72"x1.50")



HOUSING
IMPELLER
BEARING
OPERATING TEMPERATURE
INSULATION RESISTANCE
DIELECTRIC STRENGTH
WEIGHT
ROHS COMPLIANCE

Aluminum Die Casting, Painted Black
Metal
Ball
-25°C to + 75°C
10M Ohms Min. @500 VDC
5mA Max. at 500VAC 60Hz for 1 minute
515g
Yes

DIMENSION

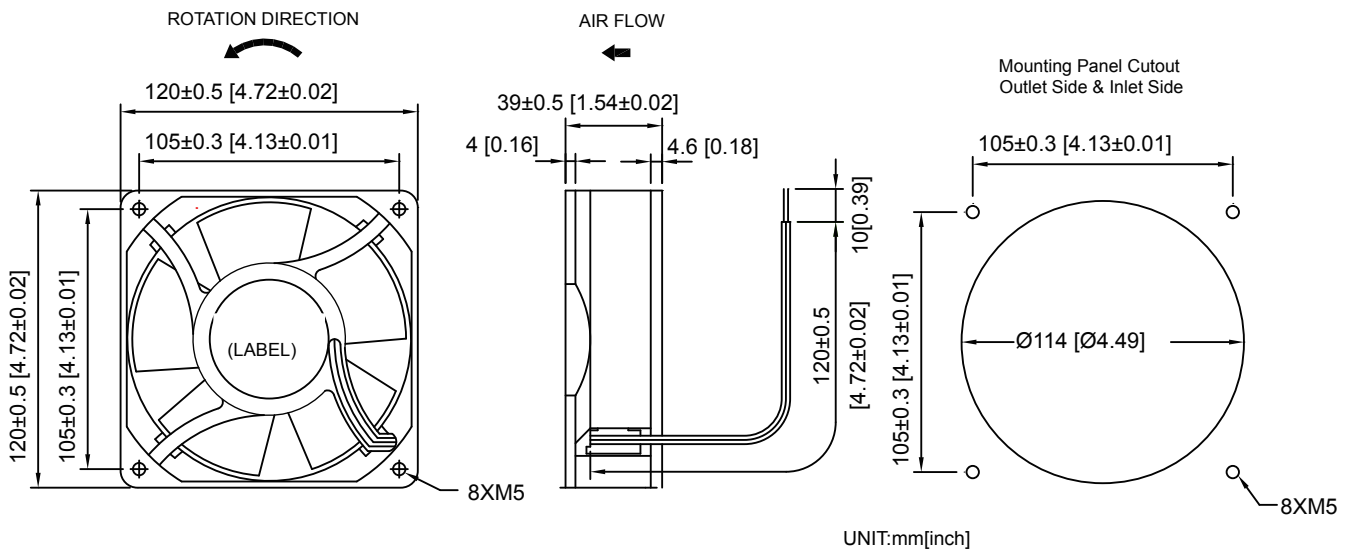

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
D12038V24HBM-CT	24	0.5	12	4000	0.64	16.27	136.81	3.87	58.3

AIR PERFORMANCE

