

D15055M




150x150x55mm
(5.9"x6.77"x2.17")



HOUSING
IMPELLER
BEARING
OPERATING TEMPERATURE
INSULATION RESISTANCE
DIELECTRIC STRENGTH
WEIGHT
ROHS COMPLIANCE

Aluminum Die Casting, Painted Black
Metal
Ball
-10°C to + 70°C
10M Ohms mins@500 VDC
5mA Max. at 500VAC 60Hz for 1 minute
1kg
Yes

DIMENSION

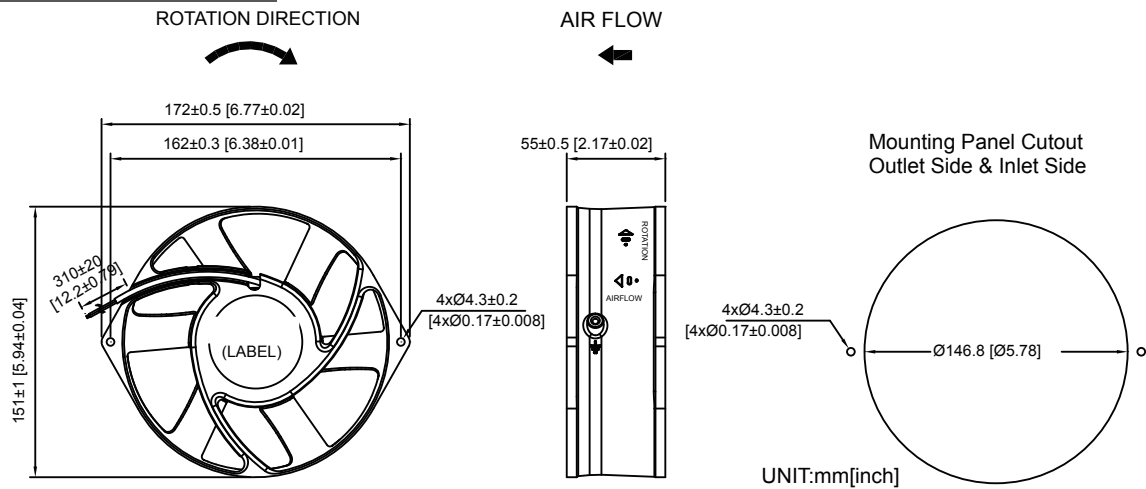

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
D15055V12LBM-DA	12	1.08	12.96	2800	0.477	12.1	195	5.52	59
D15055V12MBM-DA	12	1.65	19.8	3200	0.626	15.9	230	6.51	62
D15055V12HBM-DA	12	2.37	28.44	3600	0.808	20.5	260	7.36	65
D15055V12SLBM-DA	12	3.40	40.8	4000	1.009	25.6	295	8.35	68
D15055V24LBM-DA	24	0.54	12.96	2800	0.477	12.1	195	5.52	59
D15055V24MBM-DA	24	0.76	18.24	3200	0.626	15.9	230	6.51	62
D15055V24HBM-DA	24	1.10	26.4	3600	0.808	20.5	260	7.36	65
D15055V24SLBM-DA	24	1.36	32.64	4000	1.009	25.6	295	8.35	68
D15055V24SMBM-DA	24	1.88	45.12	4400	1.210	30.7	325	9.20	71
D15055V24SHBM-DA	24	2.24	53.76	4800	1.407	35.7	345	9.76	74
D15055V48LBM-DA	48	0.27	12.96	2800	0.477	12.1	195	5.52	59
D15055V48MBM-DA	48	0.38	18.24	3200	0.626	15.9	230	6.51	62
D15055V48HBM-DA	48	0.53	25.44	3600	0.808	20.5	260	7.36	65
D15055V48SLBM-DA	48	0.68	32.64	4000	1.009	25.6	295	8.35	68
D15055V48SMBM-DA	48	0.94	45.12	4400	1.210	30.7	325	9.20	71
D15055V48SHBM-DA	48	1.12	53.76	4800	1.407	35.7	345	9.76	74

AIR PERFORMANCE

