

# D17051




Ø172x51mm  
(Ø6.7"x2")



HOUSING  
IMPELLER  
BEARING  
OPERATING TEMPERATURE  
INSULATION RESISTANCE  
DIELECTRIC STRENGTH  
WEIGHT  
ROHS COMPLIANCE

Aluminum Die Casting, Painted Black  
Thermoplastic PBT, UL94V-0  
Ball  
-10°C to + 60°C  
10M Ohms Min. @500 VDC  
5mA Max. at 500VAC 60Hz for 1 minute  
730g  
Yes

## DIMENSION

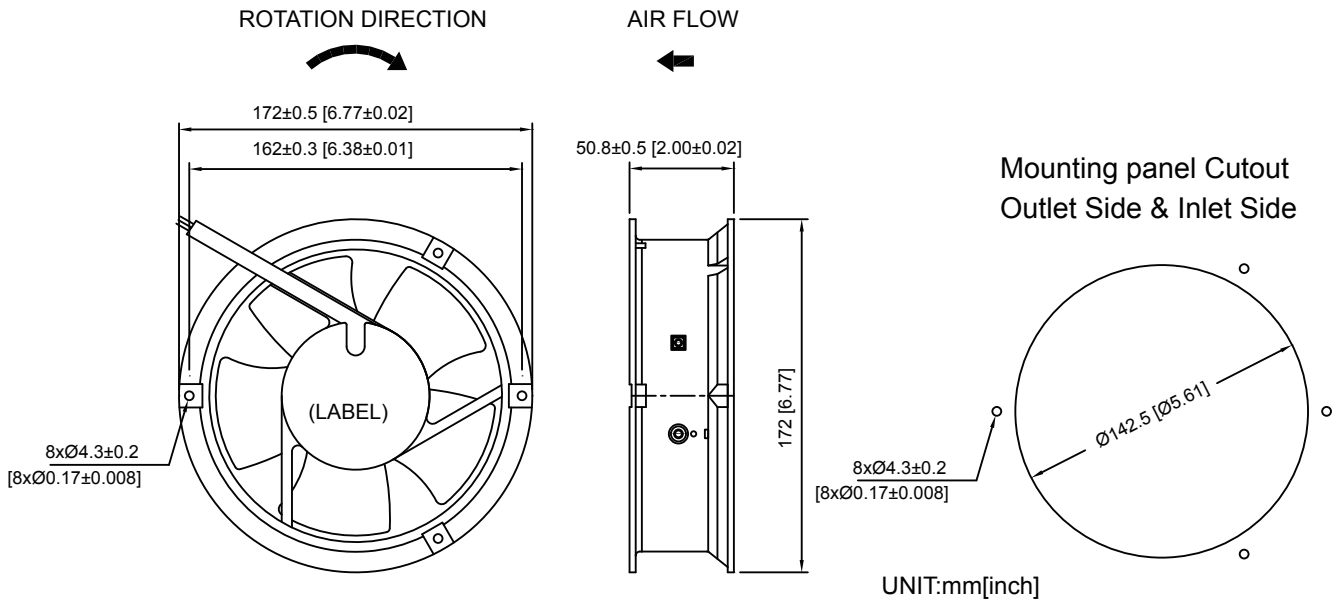

## SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D17051V24HB	24	0.80	19.2	3400	0.62	15.7	216	6.12	60
D17051V24MB	24	0.60	14.4	2900	0.54	13.9	202	5.69	56
D17051V24LB	24	0.45	10.8	2400	0.38	9.6	160	5.04	51
D17051V48HB	48	0.40	19.2	3400	0.62	15.7	216	6.12	60
D17051V48MB	48	0.35	16.8	2900	0.54	13.9	202	5.69	56
D17051V48LB	48	0.25	12.0	2400	0.38	9.6	160	5.04	51

## AIR PERFORMANCE

