

D17238M




172x151x38mm
(6.8"x5.9"x1.5")



HOUSING
IMPELLER
BEARING
OPERATING TEMPERATURE
INSULATION RESISTANCE
DIELECTRIC STRENGTH
WEIGHT
ROHS COMPLIANCE

Aluminum Die Casting, Painted Black
Metal
Ball
-10°C to + 70°C
10M Ohms Min. @500VDC
5mA Max. at 500 VAC 60Hz for 1 second
890g
Yes

DIMENSION

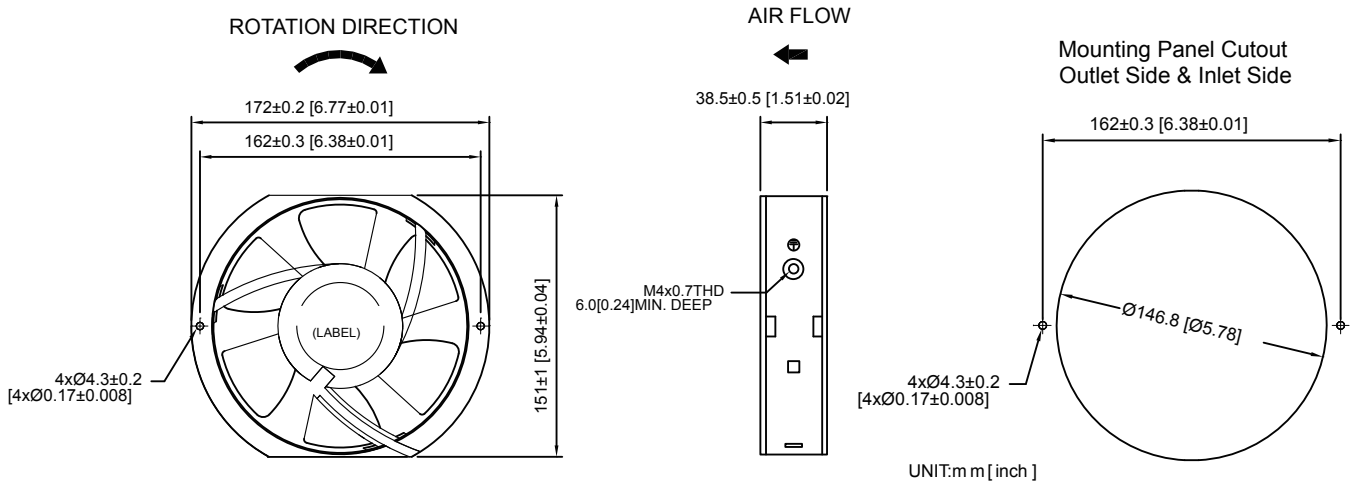

Wiring Diagram

- Red — +VDC
- Black — GND
- Blue — PWM Speed Control
- Yellow — Tachometer (FG)
- White — Rotation Detector (RD)

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
D17238V24HBM	24	0.72	17.5	3200	0.73	18.5	240	6.8	59
D17238V48HBM	48	0.36	17.5	3200	0.73	18.5	240	6.8	59

AIR PERFORMANCE

