

# D17251-5K

172x151x51mm  
(6.77"x5.94"x2")




HOUSING	Aluminum Die Casting, Painted Black
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-10°C to +60°C
INSULATION RESISTANCE	10M Ohms Min. @ 500 VDC
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute
WEIGHT	800g
ROHS COMPLIANCE	Yes

# 172mm

172mm

DC Fans & Blowers

## DIMENSION

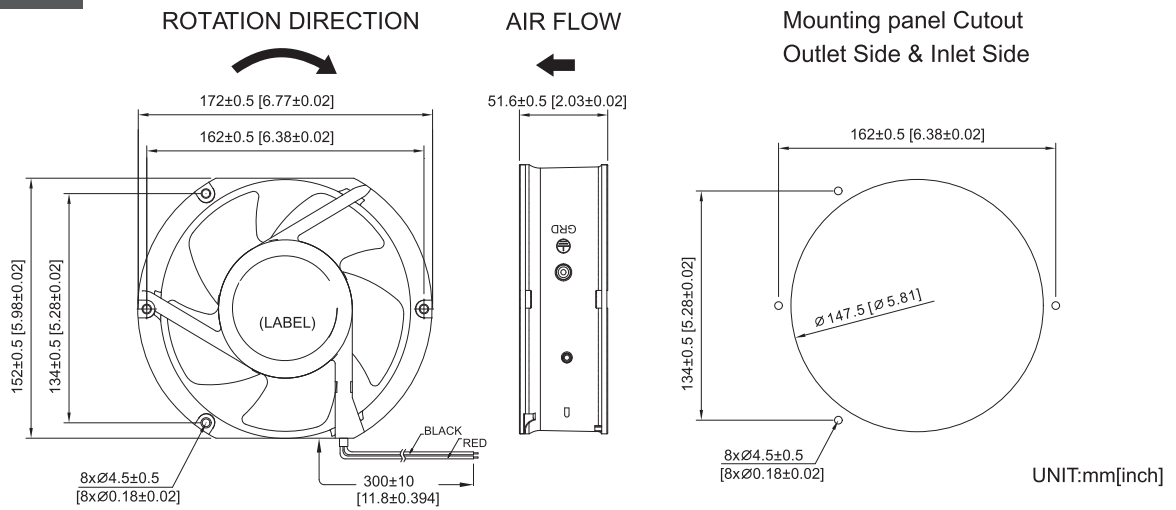

## SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D17251V24SLB-5K	24	2.40	57.6	5200	1.23	31.35	378	10.70	66
D17251V24HB-5K	24	2.10	50.4	4800	1.13	28.60	350	9.90	66
D17251V24MB-5K	24	1.20	28.8	4400	0.93	24.50	323	9.14	64
D17251V24LB-5K	24	0.80	19.2	4000	0.83	21.13	291	8.24	62
D17251V24XLB-5K	24	0.70	16.8	3500	0.75	19.14	263	7.44	57
D17251V24XXLB-5K	24	0.50	12.0	2500	0.32	8.18	187	5.29	52
D17251V48SLB-5K	48	1.30	62.4	5200	1.23	31.35	378	10.70	68
D17251V48HB-5K	48	0.85	40.8	4800	1.13	28.60	350	9.90	66
D17251V48MB-5K	48	0.70	33.6	1100	0.93	24.50	323	9.14	64
D17251V48LB-5K	48	0.50	24.0	4000	0.83	21.13	291	8.24	62
D17251V48XLB-5K	48	0.40	19.2	3500	0.75	19.14	263	7.44	57
D17251V48XXLB-5K	48	0.30	14.4	2500	0.32	8.18	187	5.29	52

## AIR PERFORMANCE

