

# D17251-A

172x151x51mm  
(6.77"x5.94"x2")




**HOUSING** Aluminum Die Casting, Painted Black  
**IMPELLER** Thermoplastic PBT, UL94V - 0  
**BEARING** Ball  
**OPERATING TEMPERATURE** -10°C to + 60°C  
**INSULATION RESISTANCE** 10M Ohms Min. @500 VDC  
**DIELECTRIC STRENGTH** 5 mA Max. at 500 VAC 60Hz for 1 minute  
**WEIGHT** 762g  
**ROHS COMPLIANCE** Yes

# 172mm

172mm

DC Fans & Blowers

## DIMENSION

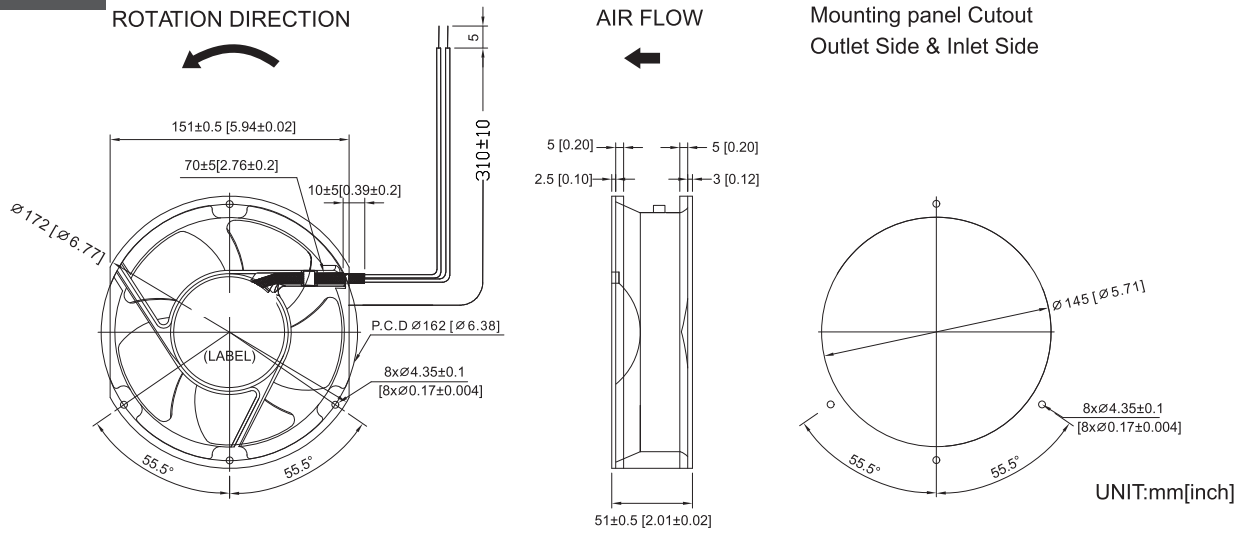

## SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D17251V12LB-A	12	2.30	27.6	3900	0.89	22	295	8.35	60.6
D17251V12XLB-A	12	1.55	18.6	3500	0.75	19	265	7.50	58.8
D17251V24SLB-A	24	2.60	62.4	5300	1.69	43	417	11.80	67.9
D17251V24HBA-A	24	2.00	48.0	4800	1.33	33	362	10.24	65.7
D17251V24MBA-A	24	1.45	34.8	4300	1.07	27	327	9.25	64.0
D17251V24LBA-A	24	1.10	26.4	3900	0.89	22	295	8.35	60.6
D17251V24XLB-A	24	0.80	19.2	3500	0.75	19	265	7.50	58.8
D17251V48SLB-A	48	1.25	60.0	5300	1.69	43	417	11.80	67.9
D17251V48HBA-A	48	0.95	45.6	4800	1.33	33	362	10.24	65.7
D17251V48MBA-A	48	0.70	33.6	4300	1.07	27	327	9.25	64.0
D17251V48LBA-A	48	0.57	27.3	3900	0.89	22	295	8.35	60.6
D17251V48XLB-A	48	0.40	19.2	3500	0.75	19	265	7.50	58.8

## AIR PERFORMANCE

