

D17251-DA




172x151x51mm
(6.77"x5.94"x2")



HOUSING
IMPELLER
BEARING
OPERATING TEMPERATURE
INSULATION RESISTANCE
DIELECTRIC STRENGTH
WEIGHT
ROHS COMPLIANCE

Aluminum Die Casting, Painted Black
Thermoplastic PBT, UL94V-0
Ball
-20°C to + 70°C
10M Ohms mins@500 VDC
5mA Max. at 500VAC 60Hz for 1 minute
1100g
Yes

DIMENSION

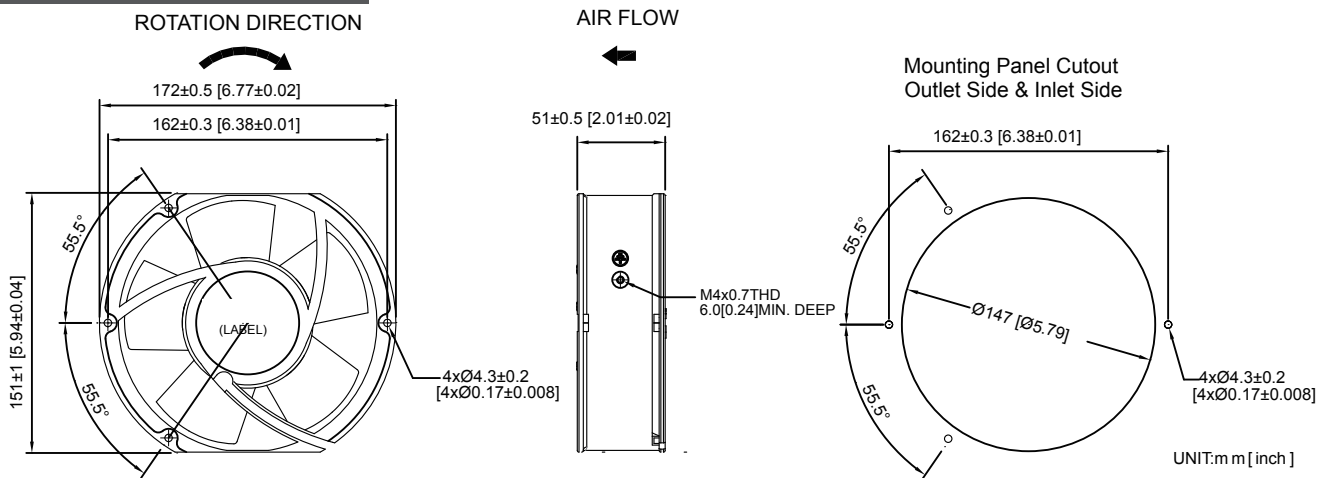

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
D17251V12LB-DA	12	1.21	14.52	2800	0.57	14.5	220	6.23	52
D17251V12MB-DA	12	1.82	21.84	3200	0.74	18.7	255	7.22	56
D17251V12HB-DA	12	2.61	31.32	3600	0.93	23.5	290	8.21	60
D17251V12SLB-DA	12	3.74	44.88	4000	1.13	28.8	335	9.48	64
D17251V24LB-DA	24	0.59	14.16	2800	0.57	14.5	220	6.23	52
D17251V24MB-DA	24	0.84	20.16	3200	0.74	18.7	255	7.22	56
D17251V24HB-DA	24	1.21	29.04	3600	0.93	23.5	290	8.21	60
D17251V24SLB-DA	24	1.50	36	4000	1.13	28.8	335	9.48	64
D17251V24SMB-DA	24	2.08	49.92	4400	1.34	34.1	355	10.05	68
D17251V24SHB-DA	24	2.46	59.04	4800	1.59	40.3	390	11.04	72
D17251V48LB-DA	48	0.30	14.4	2800	0.57	14.5	220	6.23	52
D17251V48MB-DA	48	0.42	20.16	3200	0.74	18.7	255	7.22	56
D17251V48HB-DA	48	0.58	27.84	3600	0.93	23.5	290	8.21	60
D17251V48SLB-DA	48	0.75	36	4000	1.13	28.8	335	9.48	64
D17251V48SMB-DA	48	1.04	49.92	4400	1.34	34.1	355	10.05	68
D17251V48SHB-DA	48	1.23	59.04	4800	1.59	40.3	390	11.04	72

AIR PERFORMANCE

