

# D17251

170x151x51mm  
(6.77"x6.77"x2")




**HOUSING** Aluminum Die Casting, Painted Black  
**IMPELLER** Thermoplastic PBT, UL94V - 0  
**BEARING** Ball  
**OPERATING TEMPERATURE** -10°C to + 60°C  
**INSULATION RESISTANCE** 10M Ohms Min.@500 VDC  
**DIELECTRIC STRENGTH** 5 mA Max. at 500 VAC 60Hz for 1 minute  
**WEIGHT** 792g  
**ROHS COMPLIANCE** Yes

# 172mm

172mm

DC Fans & Blowers

## DIMENSION

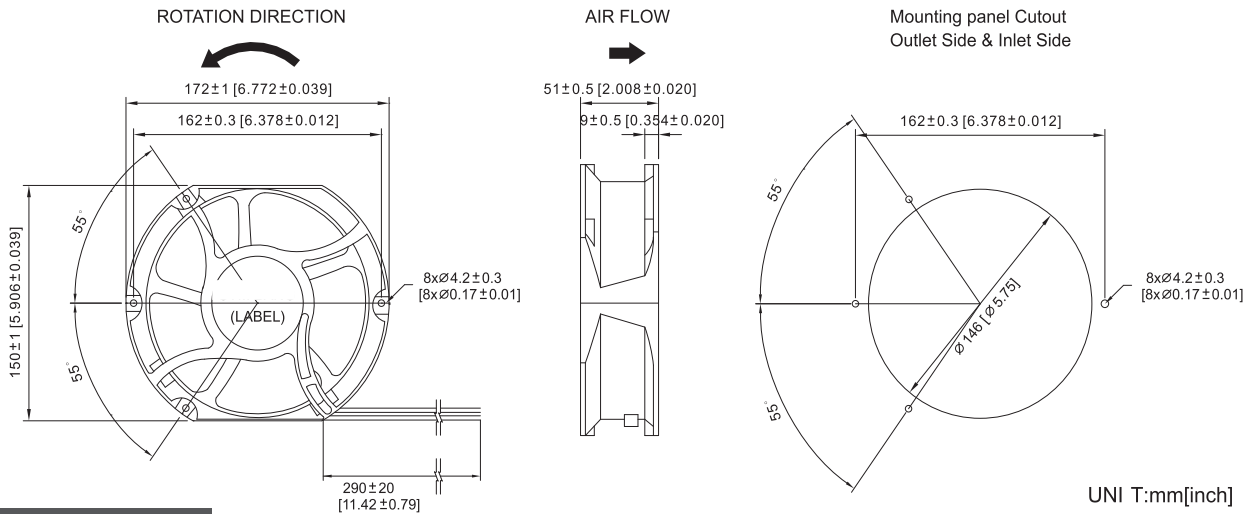

## SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB (A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D17251V12H	12	1.90	23.0	3400	0.73	18.50	228	6.46	58
D17251V12M	12	1.40	16.8	3000	0.62	15.75	203	5.75	56
D17251V12L	12	0.85	10.2	2600	0.47	11.94	175	4.96	52
D17251V12XL	12	0.60	7.2	2200	0.36	9.14	149	4.22	46
D17251V24H	24	0.87	21.0	3400	0.73	18.50	228	6.46	58
D17251V24M	24	0.65	16.0	3000	0.62	15.75	203	5.75	56
D17251V24L	24	0.44	10.5	2600	0.47	11.94	175	4.96	52
D17251V24XL	24	0.30	7.4	2200	0.36	9.14	149	4.22	46
D17251V48H	48	0.50	24.0	3400	0.73	18.50	228	6.46	58
D17251V48M	48	0.35	17.0	3000	0.62	15.75	203	5.75	56
D17251V48L	48	0.28	13.0	2600	0.47	11.94	175	4.96	52
D17251V48XL	48	0.19	9.0	2200	0.36	9.14	149	4.22	46

## AIR PERFORMANCE

