

D17251M



172x172x51mm
(6.77"x5.94"x2")




HOUSING
IMPELLER
BEARING
OPERATING TEMPERATURE
INSULATION RESISTANCE
DIELECTRIC STRENGTH
WEIGHT
ROHS COMPLIANCE

Aluminum Die Casting, Painted Black
Metal
Ball
-10°C to + 70°C
10M Ohms mins@500 VDC
5mA Max. at 500VAC 60Hz for 1 minute
1150g
Yes

DIMENSION

ROTATION DIRECTION

AIR FLOW

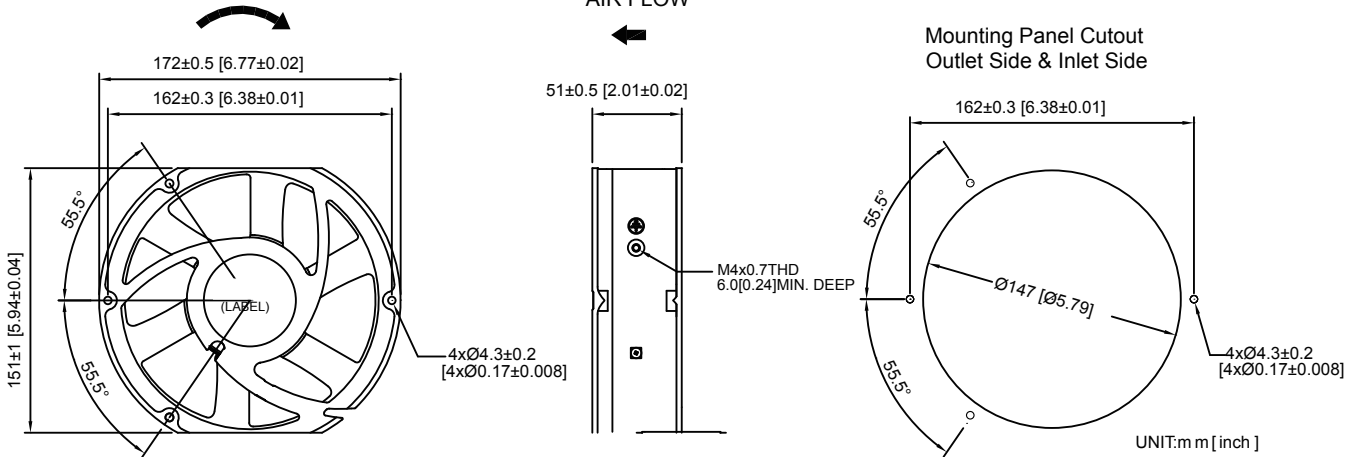

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
D17251V12LBM	12	1.08	12.96	2800	0.559	14.2	210	5.94	52
D17251V12MBM	12	1.65	19.8	3200	0.713	18.1	245	6.93	56
D17251V12HBM	12	2.37	28.44	3600	0.894	22.7	275	7.78	60
D17251V12SLBM	12	3.40	40.8	4000	1.095	27.8	310	8.77	64
D17251V24LBM	24	0.54	12.96	2800	0.559	14.2	210	5.94	52
D17251V24MBM	24	0.76	18.24	3200	0.725	18.4	245	6.93	56
D17251V24HBM	24	1.10	26.4	3600	0.894	22.7	275	7.78	60
D17251V24SLBM	24	1.36	32.64	4000	1.095	27.8	310	8.77	64
D17251V24SMBM	24	1.88	45.12	4400	1.296	32.9	340	9.62	68
D17251V24SHBM	24	2.24	53.76	4800	1.489	37.8	360	10.19	72
D17251V48LBM	48	0.27	12.96	2800	0.559	14.2	210	5.94	52
D17251V48MBM	48	0.38	18.24	3200	0.713	18.1	245	6.93	56
D17251V48HBM	48	0.53	25.44	3600	0.894	22.7	275	7.78	60
D17251V48SLBM	48	0.68	32.64	4000	1.095	27.8	310	8.77	64
D17251V48SMBM	48	0.94	45.12	4400	1.296	32.9	340	9.62	68
D17251V48SHBM	48	1.12	53.76	4800	1.489	37.8	360	10.19	72

AIR PERFORMANCE

