

D17689




176x176x89mm
(6.92"x6.92"x3.5")



HOUSING
IMPELLER
BEARING
OPERATING TEMPERATURE
INSULATION RESISTANCE
DIELECTRIC STRENGTH
WEIGHT
ROHS COMPLIANCE

Aluminum Die Casting, Painted Black
Thermoplastic PBT, Glass Fiber 30%
Ball
-10°C to +60°C
10M Ohms Min. @500VDC
5mA Max. at 500VAC 60Hz for 1 minute
1700g
Yes

DIMENSION

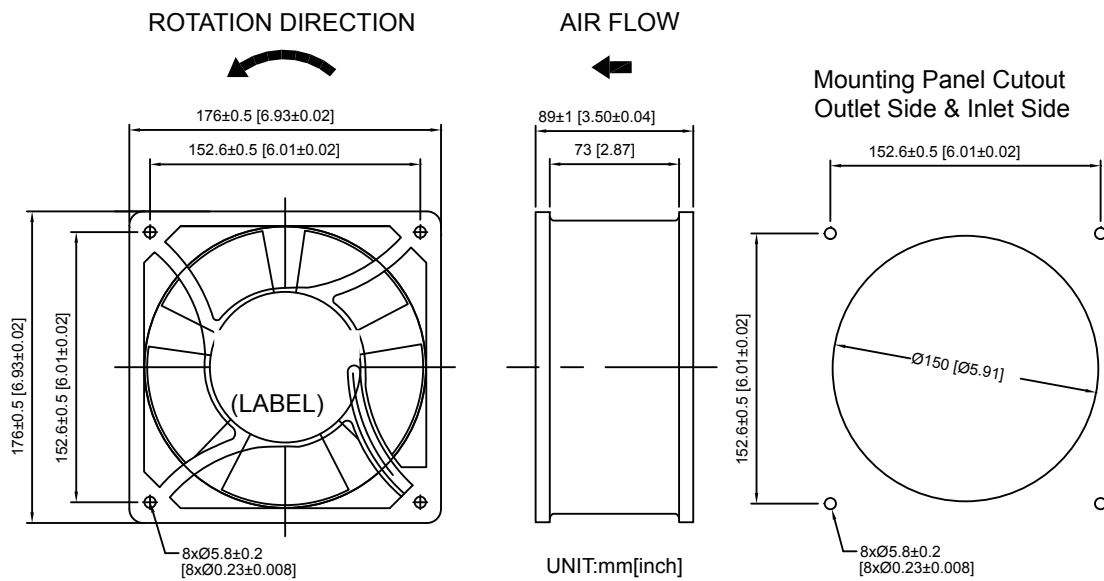

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
D17689V24SL	24	2.20	52.8	3500	0.91	23	400	11.3	65
D17689V24H	24	1.60	38.4	3100	0.79	20	350	9.9	56
D17689V24M	24	0.88	21.1	2600	0.59	15	300	8.5	47
D17689V24L	24	0.66	15.8	2300	0.43	11	260	7.4	42
D17689V48SL	48	1.10	52.8	3500	0.91	23	400	11.3	65
D17689V48H	48	0.80	38.4	3100	0.79	20	350	9.9	56
D17689V48M	48	0.44	21.1	2600	0.59	15	300	8.5	47
D17689V48L	48	0.33	15.8	2300	0.43	11	260	7.4	42

AIR PERFORMANCE

