


D1804

18x18x4mm
(0.71"x0.71"x0.16")

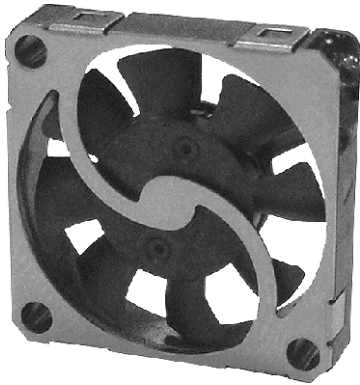


HOUSING Thermoplastic PBT, UL94V-0
 IMPELLER Thermoplastic PBT, UL94V-0
 BEARING Sleeve
 OPERATING TEMPERATURE -10°C to + 60°C
 INSULATION RESISTANCE 10M Ohms Min. @500 VDC
 DIELECTRIC STRENGTH 5 mA Max. at 500 VAC 60Hz for 1 minute
 WEIGHT 17g
 ROHS COMPLIANCE Yes
 APPLICATIONS Mini Projector

18mm

18mm

DC Fans & Blowers

DIMENSION

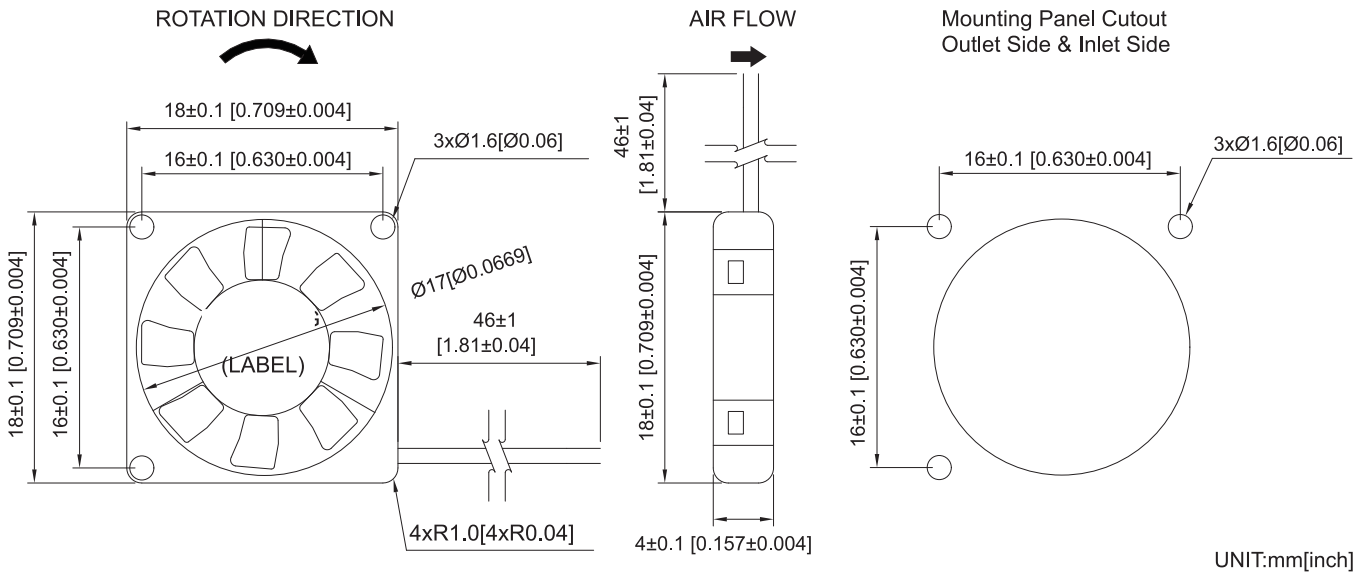

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE inchH ₂ O mmH ₂ O	MAX. AIR FLOW CFM m ³ /min	NOISE dB(A) @1M
D1804V3HS	3.3	0.032	0.105	8500	0.077 1.95	0.65 0.018	25
D1804V5HS	5.0	0.045	0.225	13000	0.113 2.88	0.90 0.026	35

AIR PERFORMANCE

