

# D2006-K




20x20x6.5mm  
(0.79"x0.79"x0.26")



HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	FMD Bearing
OPERATING TEMPERATURE	-10°C to + 60°C
INSULATION RESISTANCE	10M Ohms Min. @500 VDC
DIELECTRIC STRENGTH	5mA Max. at 500VAC 60Hz for 1 minute
WEIGHT	4g
ROHS COMPLIANCE	Yes

## DIMENSION

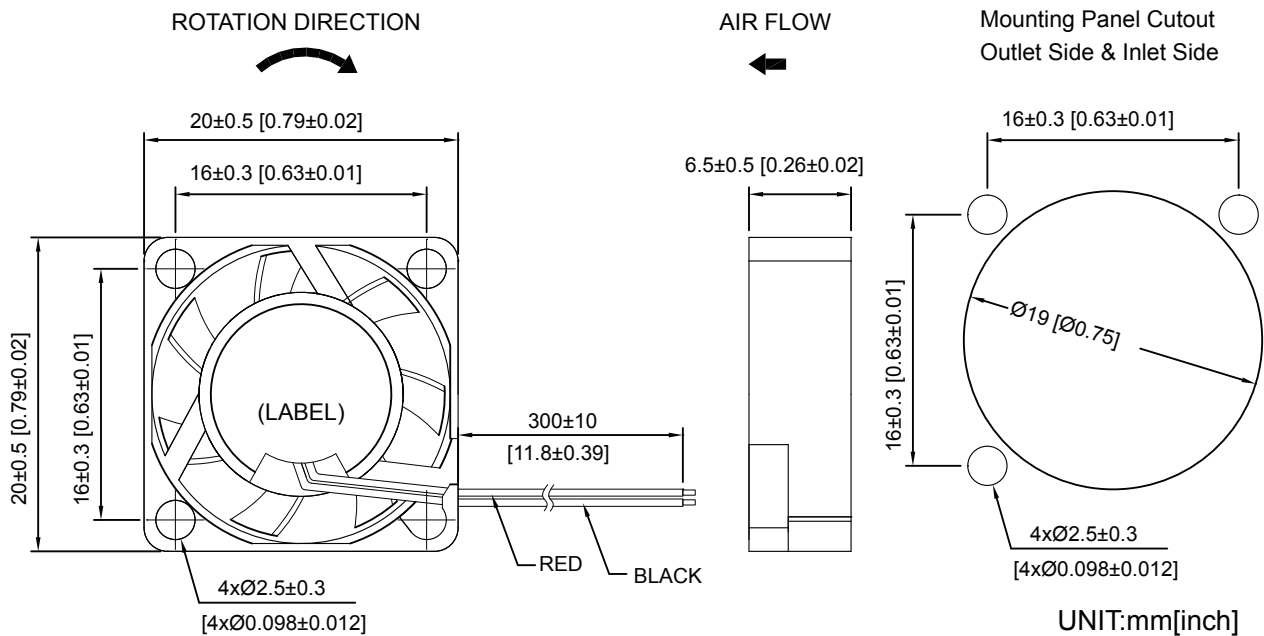

## SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D2006V5HF-K	5	0.11	0.55	13000	0.12	3.2	1.06	0.03	32
D2006V12HF-K	12	0.09	1.08	13000	0.12	3.2	1.06	0.03	32

## AIR PERFORMANCE

