

D20070

Ø 200x70mm
(Ø 7.87"x2.75")




HOUSING	Aluminum Die Casting, Painted Black
IMPELLER	Thermoplastic PBT, UL94V - 0
BEARING	Ball
OPERATING TEMPERATURE	-10°C to + 60°C
INSULATION RESISTANCE	10M Ohms Min.@500 VDC
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute
WEIGHT	1760g
ROHS COMPLIANCE	Yes

200 mm

200mm

DC Fans & Blowers

DIMENSION

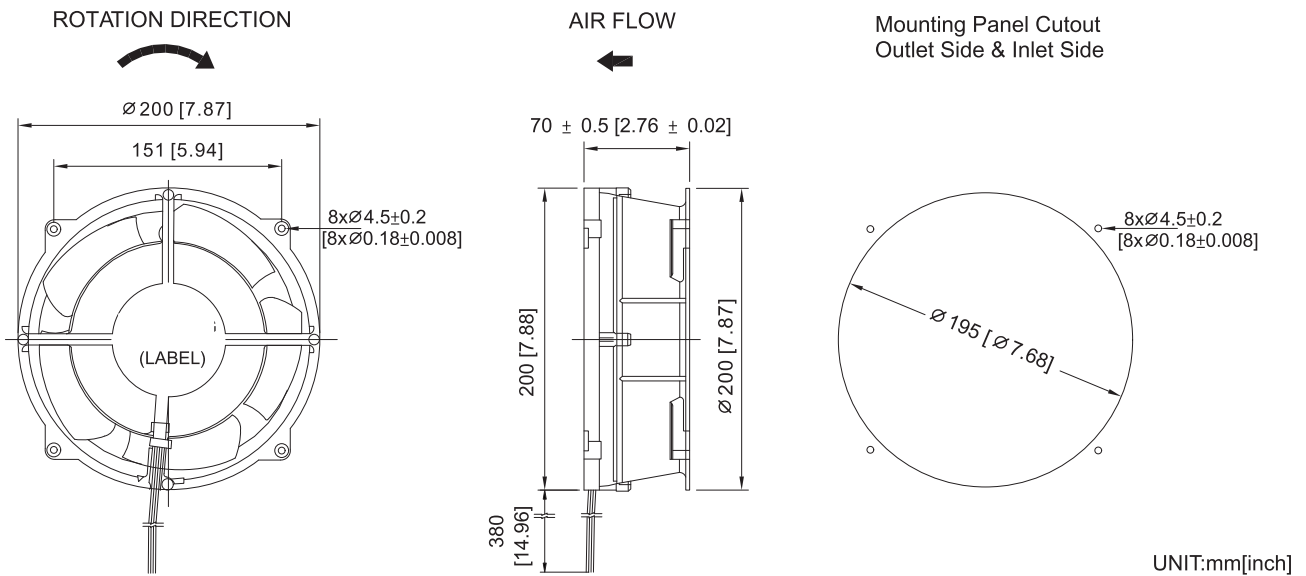

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
D20070V24HB	24	4.5	108	4600	2.85	63	550	15.6	85
D20070V48HB	48	2.3	110	4600	2.85	63	550	15.6	85
D20070V48LB	48	1.1	53	2900	1.79	45	338	9.6	58

AIR PERFORMANCE

