

D25089




ø254x89mm
(ø10"x3.5")



HOUSING
IMPELLER
BEARING
OPERATING TEMPERATURE
INSULATION RESISTANCE
DIELECTRIC STRENGTH
WEIGHT
ROHS COMPLIANCE

Aluminum Die Casting, Painted Black
Thermoplastic PC, Glass Fiber 30%
Ball
-10°C to + 60°C
10M Ohms Min.@500VDC
5mA Max. at 500VAC 60Hz for 1 minute
2200g
Yes

DIMENSION

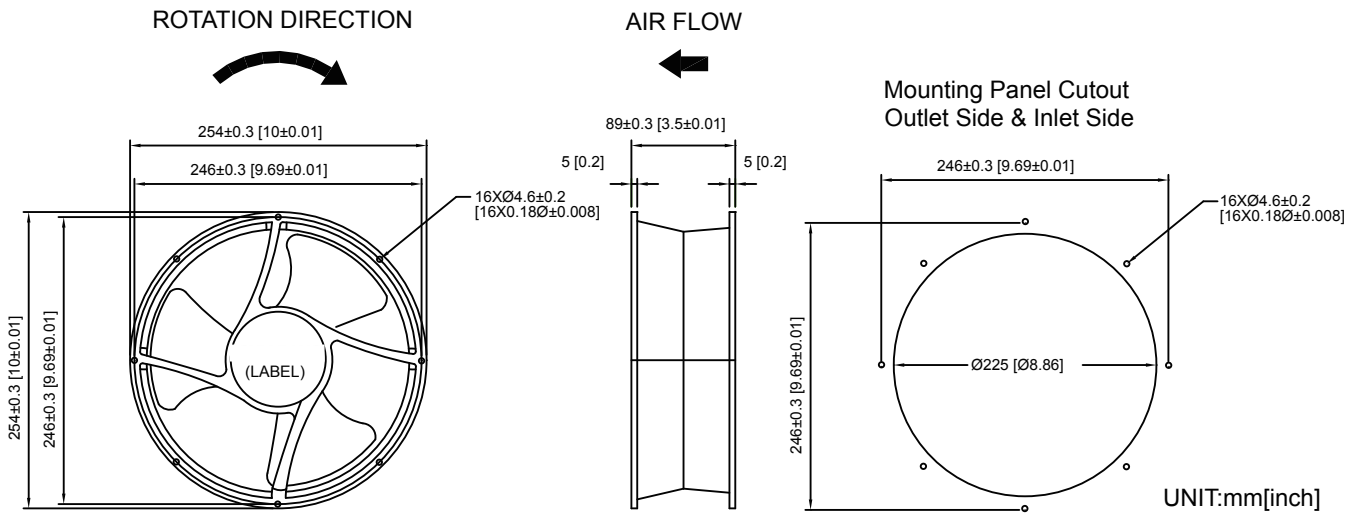

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
D25089V24HB	24	2.20	52.8	2300	0.51	13.0	740	20.9	65
D25089V24MB	24	1.70	40.8	2100	0.48	12.1	700	19.8	56
D25089V24LB	24	1.10	26.4	1800	0.39	10.0	600	17.0	50
D25089V48HB	48	1.10	52.8	2300	0.51	13.0	740	20.9	65
D25089V48MB	48	0.85	40.8	2100	0.48	12.1	700	19.8	56
D25089V48LB	48	0.55	26.4	1800	0.39	10.0	600	17.0	50

AIR PERFORMANCE

