

# D 2510-K

25x25x10mm  
(1.0"x1.0"x0.48")




HOUSING Thermoplastic PBT, UL94V-0  
 IMPELLER Thermoplastic PBT, UL94V-0  
 BEARING Ball or Sleeve  
 OPERATING TEMPERATURE -10°C to +60°C  
 INSULATION RESISTANCE 10M Ohms Min. @500 VDC  
 DIELECTRIC STRENGTH 5 mA Max. at 500 VAC 60Hz for 1 minute  
 WEIGHT 8g  
 ROHS COMPLIANCE Yes

# 25 mm

25mm

DC Fans & Blowers

## DIMENSION

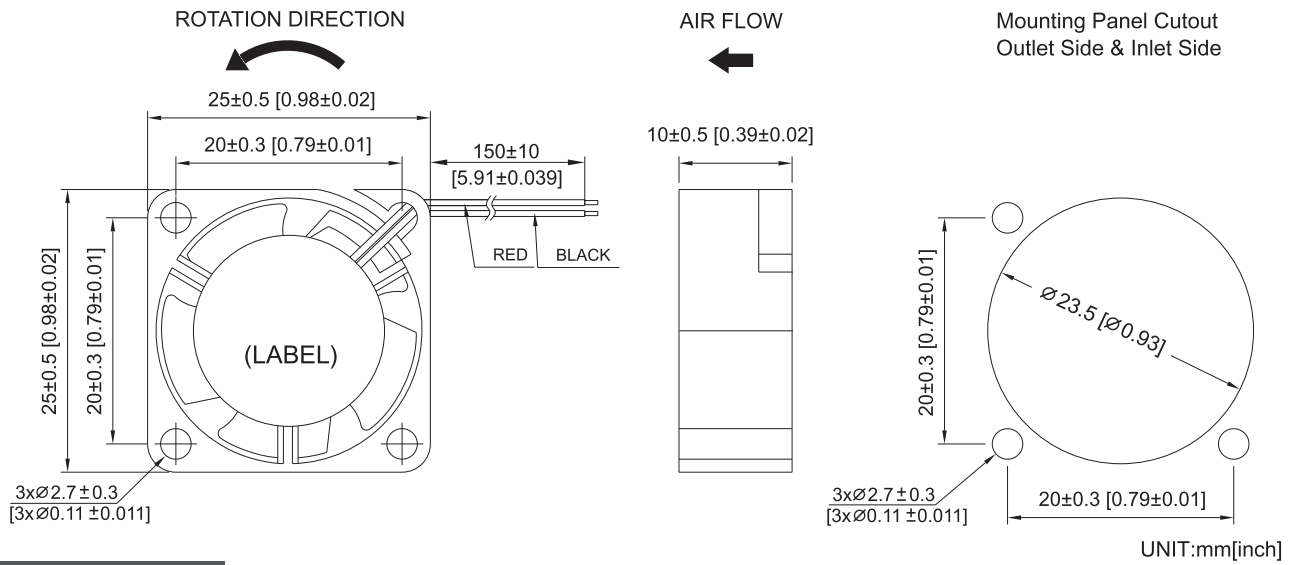

## SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D2510V5SL-K	5	0.22	1.10	13000	0.29	7.30	2.41	0.07	28.0
D2510V5H-K	5	0.16	0.80	10000	0.17	4.40	1.85	0.05	23.5
D2510V5M-K	5	0.13	0.65	7000	0.07	1.90	1.32	0.04	20.0
D2510V5L-K	5	0.12	0.60	5000	0.05	1.40	0.88	0.02	18.0
D2510V12SL-K	12	0.12	1.44	13000	0.29	7.30	2.41	0.07	28.0
D2510V12H-K	12	0.08	0.96	10000	0.17	4.40	1.85	0.05	23.5
D2510V12M-K	12	0.07	0.84	7000	0.07	1.90	1.32	0.04	20.0
D2510V12L-K	12	0.06	0.72	5000	0.05	1.40	0.88	0.02	18.0

## AIR PERFORMANCE

