

# D28080M-PB




280x280x80mm  
(11.02"x11.02"x3.15")



HOUSING  
IMPELLER  
BEARING  
MOTOR TYPE  
OPERATING TEMPERATURE  
INSULATION RESISTANCE  
DIELECTRIC STRENGTH  
WEIGHT  
ROHS COMPLIANCE

Aluminum Die Casting  
Metal  
Ball  
Outer Rotor, Three Phase Motor  
-10°C to + 60°C  
10M Ohms Min. @500 VDC  
5mA Max. at 500VAC 60Hz for 1 second  
2.5kg  
Yes

## DIMENSION

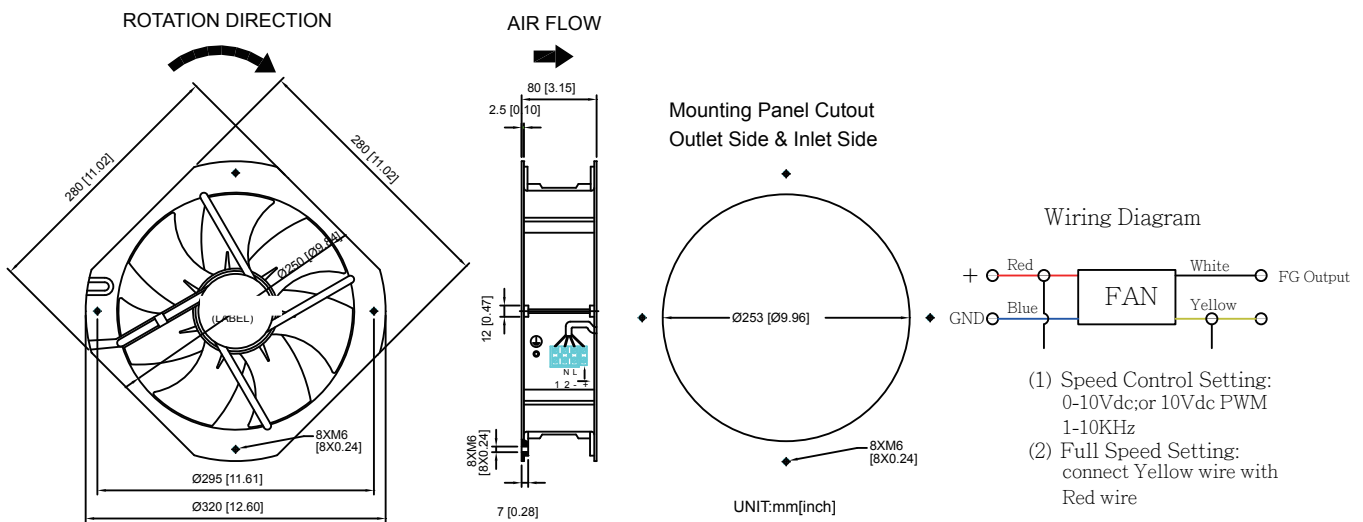

## SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE inchH <sub>2</sub> O    mmH <sub>2</sub> O	MAX. AIR FLOW CFM    m <sup>3</sup> /min	NOISE dB(A) @1M
D28080V24HBM-PB	24	4.4	105.6	2750	0.88    22.4	1118    31.6	69
D28080V48HBM-PB	48	2.2	105.6	2750	0.88    22.4	1118    31.6	69

## AIR PERFORMANCE

