


D3006-A

30x30x6mm
(1.18"x1.18"x0.23")




HOUSING Thermoplastic PBT,UL94V-0
 IMPELLER Thermoplastic PBT,UL94V-0
 BEARING One Ball One Sleeve
 OPERATING TEMPERATURE -10°C to +60°C
 INSULATION RESISTANCE 10M Ohms Min.@500 VDC
 DIELECTRIC STRENGTH 5 5 mA Max. at 500 VAC 60Hz for 1 minute
 WEIGHT 6g
 ROHS COMPLIANCE Yes

30mm

30mm

DC Fans & Blowers

DIMENSION

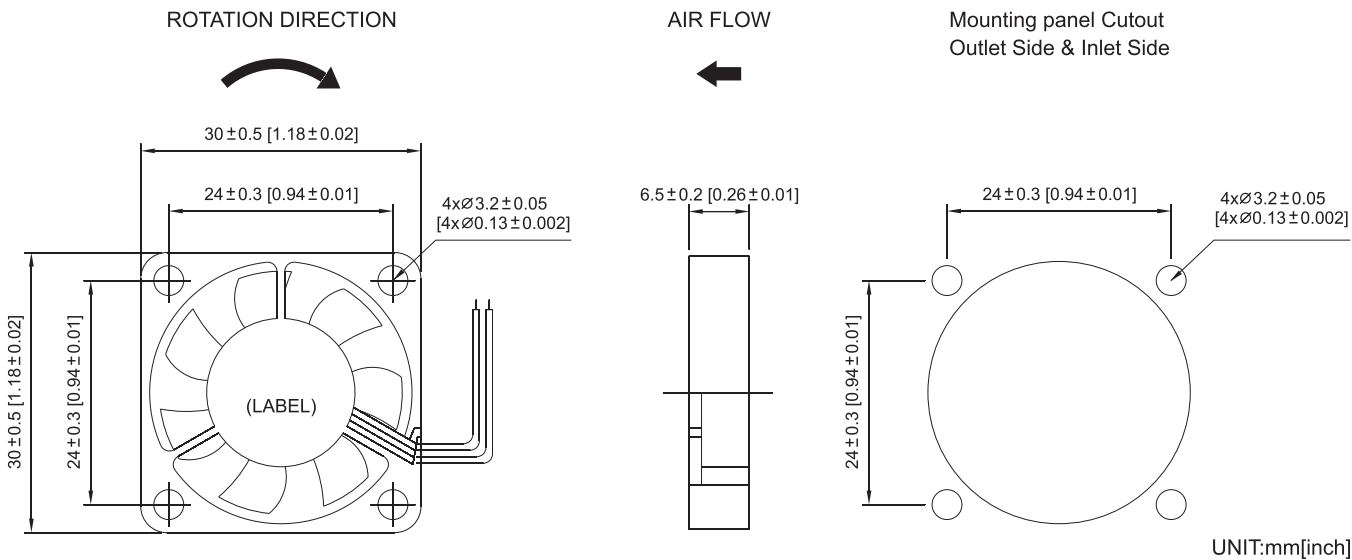

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
D3006V5HO-A	5	0.12	0.60	10500	0.169	4.21	3.61	0.102	32.1
D3006V5MO-A	5	0.10	0.50	9000	0.137	3.44	3.08	0.087	27.9
D3006V5LO-A	5	0.05	0.25	7500	0.082	2.08	2.55	0.072	20.0
D3006V5XLO-A	5	0.05	0.25	6000	0.050	1.27	2.55	0.057	17.0
D3006V12HO-A	12	0.08	0.96	10500	0.169	4.21	3.61	0.102	32.1
D3006V12LO-A	12	0.05	0.60	7500	0.082	2.08	2.55	0.072	20.0

AIR PERFORMANCE

