

D3010-CT




30x30x10mm
(1.18"x1.18"x0.4")



HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-10°C to + 70°C
INSULATION RESISTANCE	10M Ohms Min. @500 VDC
DIELECTRIC STRENGTH	5mA Max. at 500VAC 60Hz for 1 second
WEIGHT	10.1g
ROHS COMPLIANCE	Yes

DIMENSION

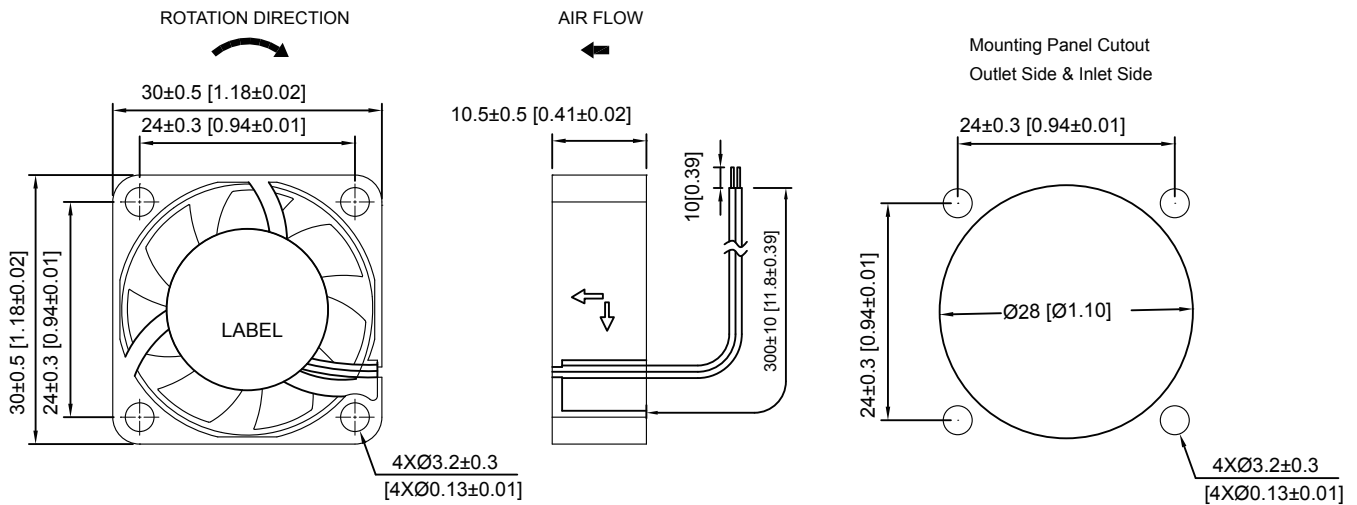

UNIT:mm[inch]

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
D3010V5L-CT	5	0.06	0.3	6000	0.09	2.33	2.99	0.08	17.0
D3010V12H-CT	12	0.07	0.84	9000	0.21	5.25	4.48	0.13	29.0
D3010V12M-CT	12	0.05	0.6	7500	0.14	3.65	3.73	0.11	24.0

AIR PERFORMANCE

