

D3010-K

30x30x10mm
(1.18"x1.18"x0.4")




HOUSING Thermoplastic PBT, UL94V-0
IMPELLER Thermoplastic PBT, UL94V-0
BEARING Ball
OPERATING TEMPERATURE -10°C to +60°C
INSULATION RESISTANCE 10Meg Ohms Min. @500 VDC
DIELECTRIC STRENGTH 5 mA Max. at 500 VAC 60Hz for 1 minute
WEIGHT 9g
ROHS COMPLIANCE Yes

30_{mm}

30mm

DC Fans & Blowers

DIMENSION

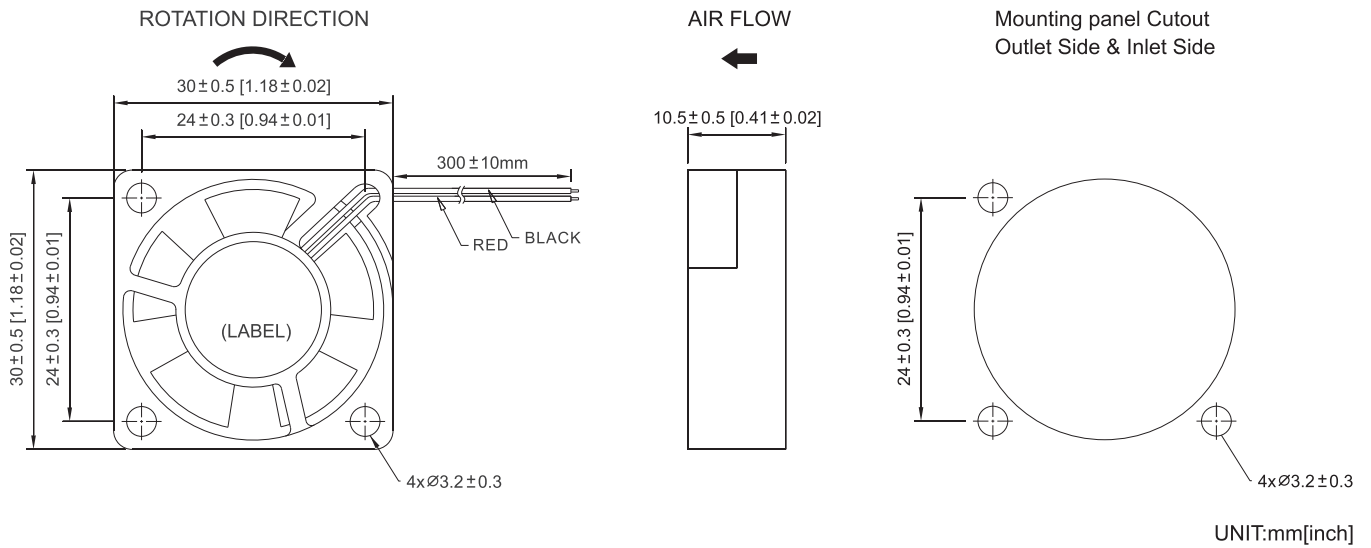

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	m ³ /min	CFM	
D3010V5SL-K	5	0.23	1.15	11000	0.17	4.3	0.12	4.24	25
D3010V5H-K	5	0.19	0.95	9000	0.11	2.9	0.10	3.47	25
D3010V5M-K	5	0.15	0.75	7500	0.08	2.1	0.08	2.79	20
D3010V5L-K	5	0.12	0.60	6000	0.05	1.3	0.06	2.16	18
D3010V12SL-K	12	0.13	1.56	11000	0.17	4.3	0.12	4.24	25
D3010V12H-K	12	0.10	1.20	9000	0.11	2.9	0.10	3.47	25
D3010V12M-K	12	0.08	0.96	7500	0.08	2.1	0.08	2.79	20
D3010V12L-K	12	0.07	0.84	6000	0.05	1.3	0.06	2.16	18

AIR PERFORMANCE

