


D3510-A

35x35x10mm
(1.38"x1.38"x0.4")

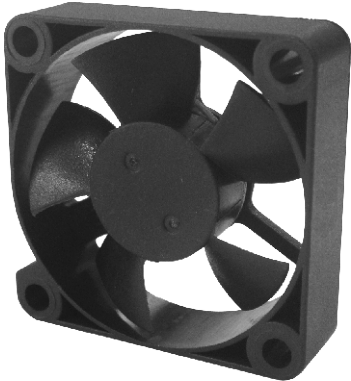


HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-10°C to + 60°C
INSULATION RESISTANCE	10M Ohms Min.@500 VDC
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute
WEIGHT	9g
ROHS COMPLIANCE	Yes

35mm

35mm

DIMENSION

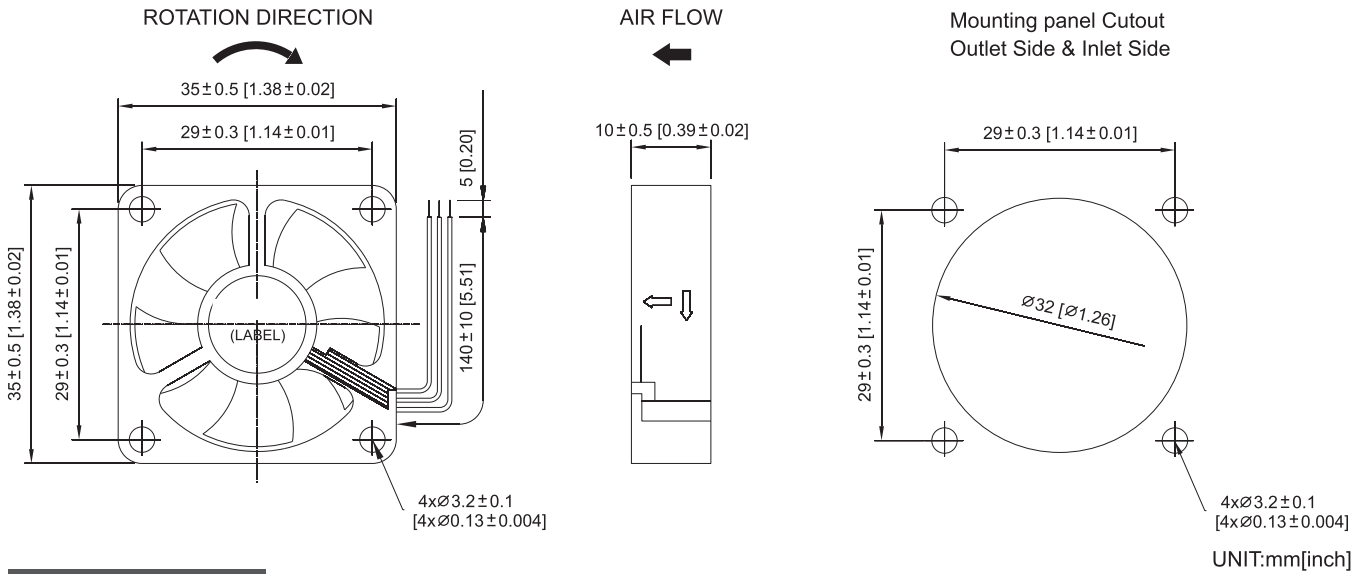

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE inchH ₂ O mmH ₂ O	MAX. AIR FLOW CFM m ³ /min	NOISE dB(A) @1M
D3510V5SL-A	5	0.14	0.70	9500	0.200 5.08	7.20 0.203	36.0
D3510V5H-A	5	0.12	0.60	8000	0.170 4.32	6.00 0.170	32.0
D3510V5M-A	5	0.09	0.45	7000	0.100 2.54	5.00 0.142	28.0
D3510V5L-A	5	0.04	0.21	4500	0.050 1.27	3.00 0.085	17.0
D3510V12H-A	12	0.09	1.08	9500	0.200 5.08	7.20 0.203	36.0
D3510V12M-A	12	0.05	0.60	8000	0.170 4.32	6.00 0.170	32.0
D3510V12L-A	12	0.05	0.60	7000	0.100 2.54	5.00 0.142	28.0

AIR PERFORMANCE

