

D 4007

40x40x7mm
(1.57"x1.57"x0.28")




HOUSING Thermoplastic PBT, UL94V-0
 IMPELLER Thermoplastic PBT, UL94V-0
 BEARING Ball or Sleeve
 OPERATING TEMPERATURE -10°C to + 60°C
 INSULATION RESISTANCE 10M Ohms Min. @500 VDC
 DIELECTRIC STRENGTH 5 mA Max. at 500 VAC 60Hz for 1 minute
 WEIGHT 8g
 ROHS COMPLIANCE Yes

40mm

40mm

DC Fans & Blowers

DIMENSION

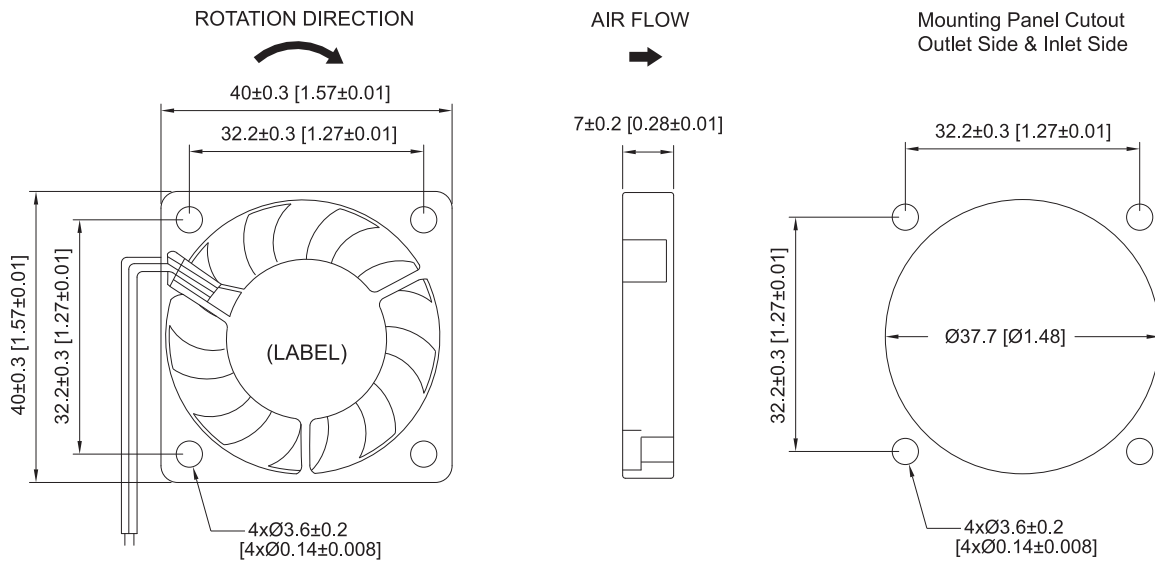

UNIT:mm[inch]

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
D4007V5HB	5	0.25	1.3	7500	0.11	2.89	6.51	0.18	34
D4007V5MB	5	0.23	1.2	6500	0.10	2.44	5.40	0.15	30
D4007V12HB	12	0.13	1.6	7500	0.11	2.89	6.51	0.18	34
D4007V12MB	12	0.11	1.3	6500	0.10	2.44	5.40	0.15	30

AIR PERFORMANCE

