

D4010-CT




40x40x10mm
(1.57"x1.57"x0.39")



HOUSING
IMPELLER
BEARING
OPERATING TEMPERATURE
INSULATION RESISTANCE
DIELECTRIC STRENGTH
WEIGHT
ROHS COMPLIANCE

Thermoplastic PBT, UL94V-0
Thermoplastic PBT, UL94V-0
Sleeve
-10°C to + 70°C
10M Ohms Min. @500 VDC
5mA Max. at 500VAC 60Hz for 1 second
18g
Yes

DIMENSION

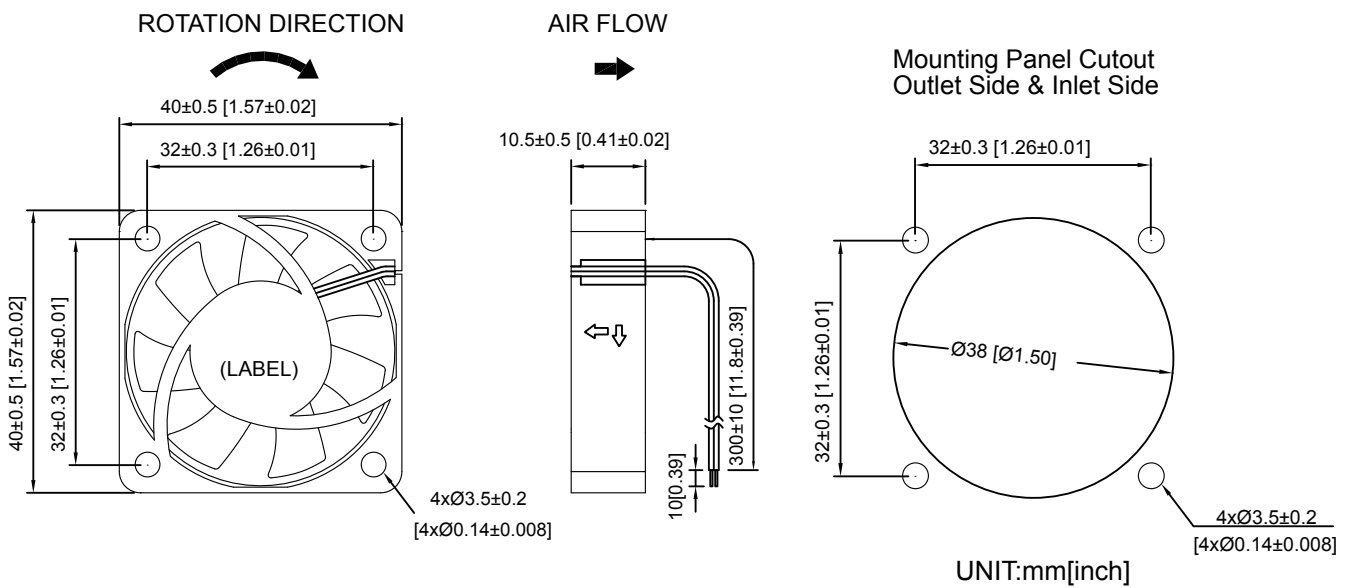

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
D4010V5XL-CT	5	0.16	0.8	4500	0.06	1.59	5.06	0.14	16.3
D4010V12XL-CT	12	0.10	1.2	4500	0.06	1.59	5.06	0.14	16.3

AIR PERFORMANCE

