

# D 4010-K



40x40x10mm  
(1.57"x1.57"x0.39")




HOUSING Thermoplastic PBT of UL94V-0  
 IMPELLER Thermoplastic PBT of UL94V-0  
 BEARING Ball  
 OPERATING TEMPERATURE -10°C to +60°C  
 INSULATION RESISTANCE 10M Ohm Min. At 500 VDC  
 DIELECTRIC STRENGTH 5 mA Max. at 500 VAC 60Hz for 1 minute  
 WEIGHT 15g  
 ROHS COMPLIANCE Yes

# 40mm

40mm

DC Fans & Blowers

## DIMENSION

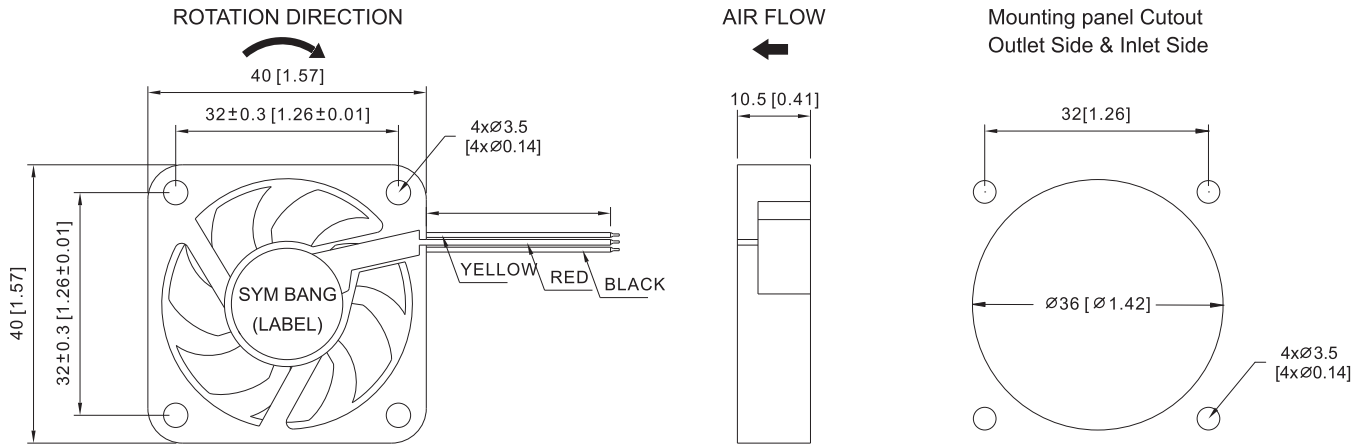

UNIT:mm[inch]

## SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D4010V5SL-K	5	0.22	1.10	7000	0.18	4.6	7.92	0.22	33
D4010V5H-K	5	0.16	0.80	6000	0.15	3.9	6.36	0.18	29
D4010V5M-K	5	0.13	0.65	5000	0.11	2.7	5.30	0.15	25
D4010V5L-K	5	0.09	0.45	4000	0.07	1.8	3.91	0.11	21
D4010V12SM-K	12	0.19	2.28	8000	0.24	6.0	9.05	0.26	38
D4010V12SL-K	12	0.15	1.80	7000	0.18	4.6	7.92	0.22	33
D4010V12H-K	12	0.11	1.32	6000	0.15	3.9	6.36	0.18	29
D4010V12M-K	12	0.10	1.20	5000	0.18	2.7	5.30	0.15	25
D4010V12L-K	12	0.08	0.96	4000	0.07	1.8	3.91	0.11	21
D4010V24SM-K	24	0.09	2.16	8000	0.24	6.0	9.05	0.26	38
D4010V24SL-K	24	0.08	1.92	7000	0.18	4.6	7.92	0.22	33
D4010V24H-K	24	0.07	1.68	6000	0.15	3.9	6.36	0.18	29
D4010V24M-K	24	0.04	0.96	5000	0.18	2.7	5.30	0.15	25
D4010V24L-K	24	0.03	0.72	4000	0.07	1.8	3.91	0.11	21

## AIR PERFORMANCE

