

# D4010

40x40x10mm  
(1.57"x1.57"x0.39")




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball or Sleeve
OPERATING TEMPERATURE	-10°C to + 60°C
INSULATION RESISTANCE	10M Ohms Min. @500 VDC
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute
WEIGHT	18g
ROHS COMPLIANCE	Yes

# 40mm

40mm

## DIMENSION

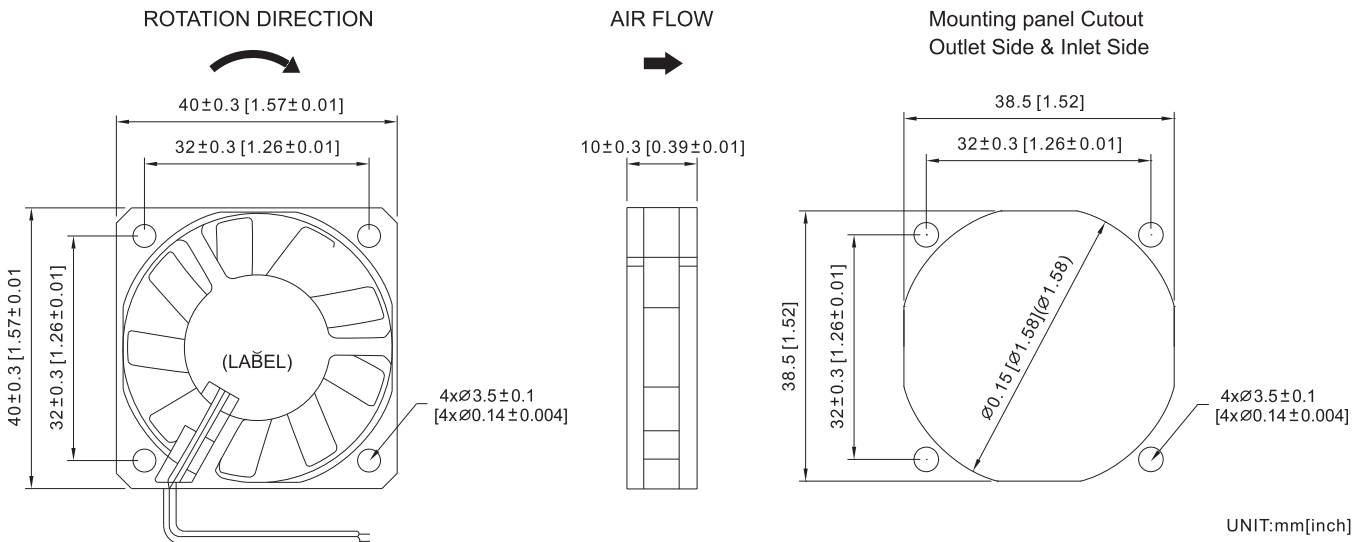

## SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB (A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D4010V5H	5	0.23	1.15	6500	0.09	2.40	7.70	0.22	29.0
D4010V5M	5	0.18	0.90	5000	0.07	1.87	6.48	0.18	24.5
D4010V12H	12	0.13	1.56	6500	0.09	2.40	7.70	0.22	29.0
D4010V12M	12	0.09	1.08	5000	0.07	1.87	6.48	0.18	24.5
D4010V24H	24	0.13	3.12	5500	0.07	1.95	7.00	0.19	28.0

## AIR PERFORMANCE

