

D 4028D-K



40x40x28mm
(1.57"x1.57"x1.1")




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-10°C to + 60°C
INSULATION RESISTANCE	10M Ohms Min. @500 VDC
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute
WEIGHT	40g
ROHS COMPLIANCE	Yes

40mm

40mm

DC Fans & Blowers

DIMENSION

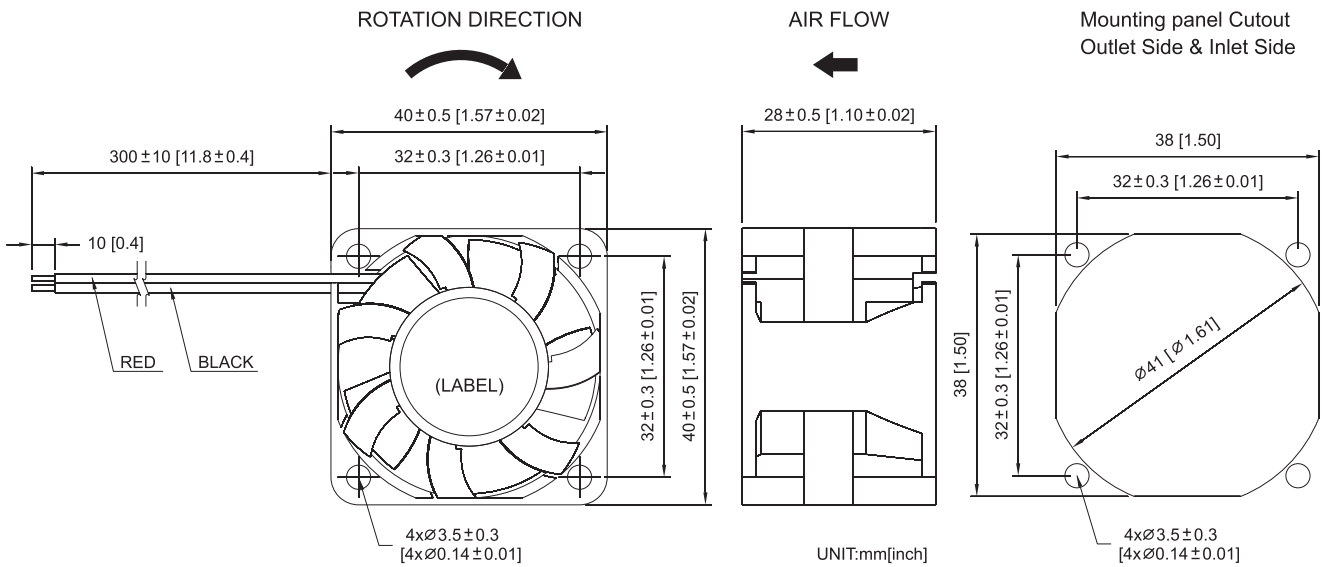

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
D4028V12SHBD-K	12	0.81	9.72	18000	1.76	44.8	27.2	0.70	60
D4028V12SMBD-K	12	0.70	8.40	15000	1.64	41.6	24.8	0.70	58
D4028V12SLBD-K	12	0.55	6.60	13000	1.32	33.7	23.8	0.67	54
D4028V12HBD-K	12	0.35	4.20	11000	0.92	23.4	18.7	0.53	48
D4028V12MBD-K	12	0.26	3.12	9500	0.69	17.6	15.9	0.45	42
D4028V12LBD-K	12	0.18	2.16	8000	0.46	11.6	13.9	0.39	40
D4028V24SLBD-K	24	0.27	6.48	13000	1.32	33.7	23.8	0.67	54
D4028V24HBD-K	24	0.20	4.80	11000	0.92	23.4	18.7	0.53	48
D4028V24MBD-K	24	0.15	3.60	9500	0.69	17.6	15.9	0.45	42

AIR PERFORMANCE

