

D5010

50x50x10mm
(1.97"x1.97"x0.39")




HOUSING Thermoplastic PBT, UL94V-0
 IMPELLER Thermoplastic PBT, UL94V-0
 BEARING Ball or Sleeve
 OPERATING TEMPERATURE -10°C to +60°C
 INSULATION RESISTANCE 10 M Ohms Min. @500 VDC
 DIELECTRIC STRENGTH 5 mA Max. at 500 VAC 60Hz for 1 minute
 WEIGHT 20g
 ROHS COMPLIANCE Yes

50mm

50mm

DC Fans & Blowers

DIMENSION

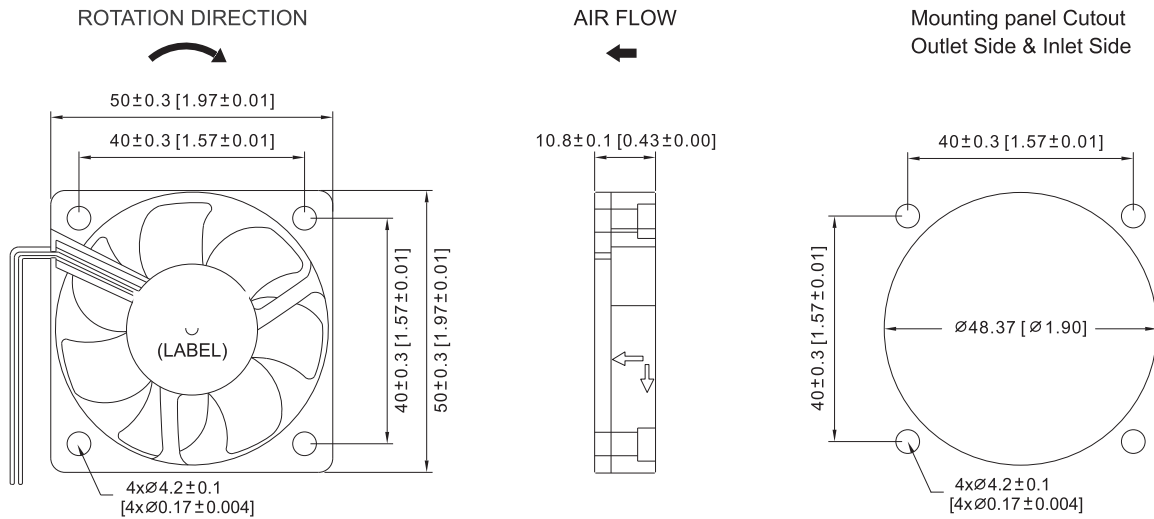

UNIT:mm[inch]

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
D5010V12H	12	0.16	1.92	5500	0.10	2.54	12.21	0.35	32
D5010V12M	12	0.10	1.20	4000	0.06	1.46	8.79	0.25	29
D5010V12L	12	0.07	0.84	3500	0.05	1.20	7.49	0.21	20

AIR PERFORMANCE

