

D5015

50x50x15mm
(1.97"x1.97"x0.59")




HOUSING Thermoplastic PBT, UL94V-0
 IMPELLER Thermoplastic PBT, UL94V-0
 BEARING Ball or Sleeve
 OPERATING TEMPERATURE -10°C to + 60°C
 INSULATION RESISTANCE 10M Ohms Min.@500 VDC
 DIELECTRIC STRENGTH 5 mA Max. at 500 VAC 60Hz for 1 minute
 WEIGHT 30g
 ROHS COMPLIANCE Yes

50_{mm}

50mm

DC Fans & Blowers

DIMENSION

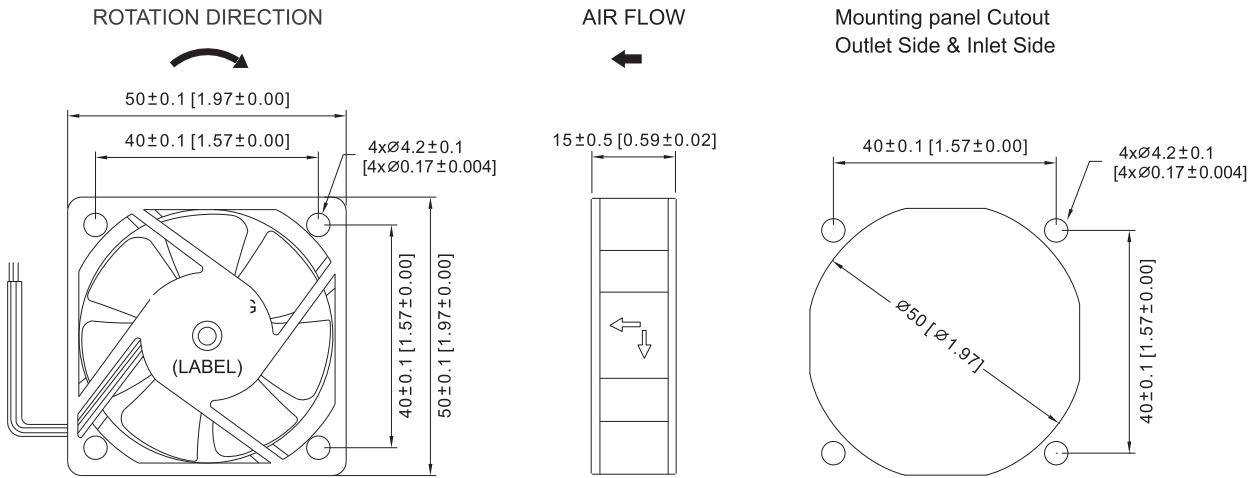

UNIT:mm[inch]

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
D5015V12H	12	0.19	2.28	6300	0.23	5.93	17.22	0.49	38
D5015V12M	12	0.15	1.80	5600	0.20	5.16	15.75	0.45	35

AIR PERFORMANCE

