

D6010

60x60x10mm
(2.36"x2.36"x0.39")




HOUSING Thermoplastic PBT, UL94V-0
 IMPELLER Thermoplastic PBT, UL94V-0
 BEARING Ball or Sleeve
 OPERATING TEMPERATURE -10°C to +60°C
 INSULATION RESISTANCE 10M Ohms Min. @500 VDC
 DIELECTRIC STRENGTH 5 mA Max. at 500 VAC 60Hz for 1 minute
 WEIGHT 30g
 ROHS COMPLIANCE Yes

60mm

60mm

DC Fans & Blowers

DIMENSION

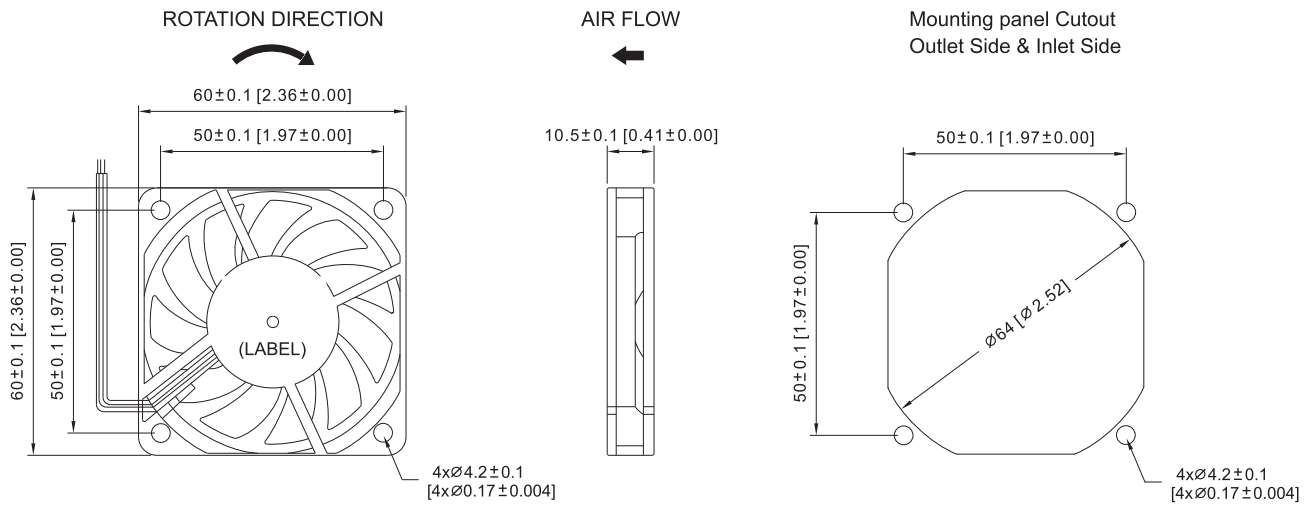

UNIT:mm[inch]

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
D6010V12H	12	0.21	2.52	4700	0.13	3.30	23.30	0.66	36
D6010V12M	12	0.16	1.92	4200	0.11	2.84	20.70	0.59	35
D6010V12L	12	0.13	1.56	3600	0.10	2.50	18.30	0.52	29
D6010V24H	24	0.16	3.84	4700	0.13	3.30	23.30	0.66	36
D6010V24M	24	0.15	3.60	4200	0.11	2.84	20.70	0.59	35

AIR PERFORMANCE

